


| | | | | |
|---|---------------|--|--------------|--------------------|
|  | Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| | Type: | Performance report | Rev: | 1.2 |
| | Orig: | | Date: | September 07, 2018 |

Performance report for SiT3372 - 70.656 MHz, HCSL

This performance report contains the following data:

- Phase noise
- Random phase jitter
- Output waveforms
- Pull range linearity
- Frequency stability over temperature
- Period jitter
- Duty cycle
- Rise/Fall time
- Amplitude
- Current consumption



| | | | |
|---------------|--|--------------|--------------------|
| Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| Type: | Performance report | Rev: | 1.2 |
| Orig: | | Date: | September 07, 2018 |

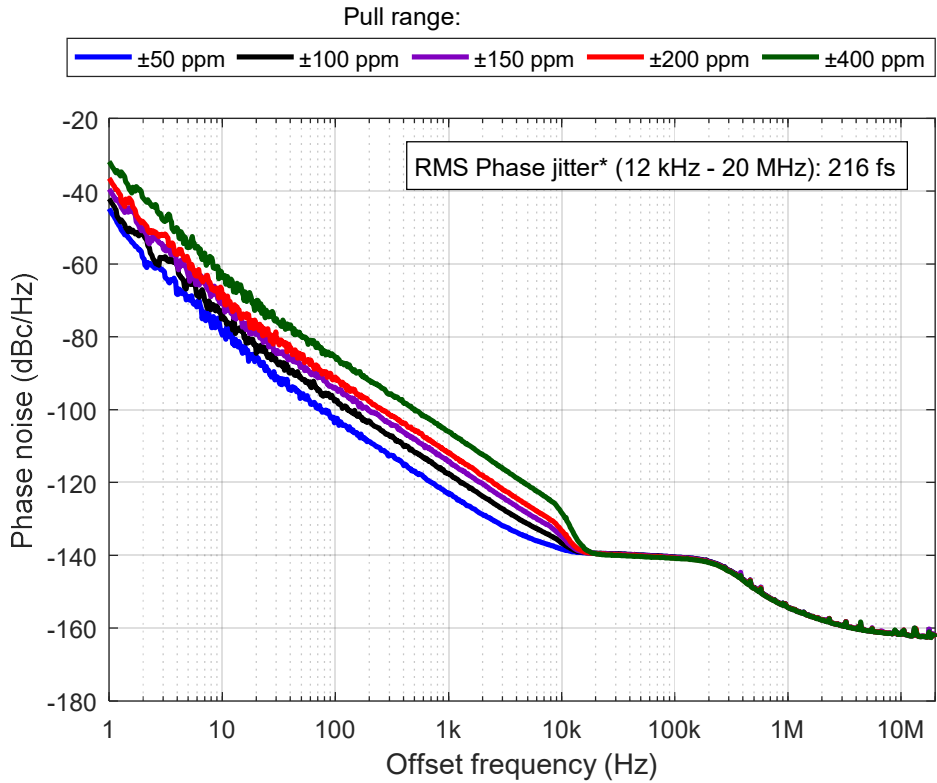


Figure 1: Phase noise, 3.3 V

**Integrated phase jitter value applies for ±50 ppm to ±400 ppm pull ranges*

Table 1: Phase noise

| Phase noise dBc/Hz | | | | | |
|-----------------------|------------------|--------|--------|--------|--------|
| Frequency offset (Hz) | Pull range (ppm) | | | | |
| | ±50 | ±100 | ±150 | ±200 | ±400 |
| 1 | -44.8 | -42.1 | -39.4 | -36.4 | -31.9 |
| 10 | -79.5 | -74.0 | -70.0 | -68.7 | -63.6 |
| 100 | -102.3 | -97.2 | -94.0 | -91.1 | -85.6 |
| 1 K | -122.9 | -117.5 | -114.2 | -112.0 | -106.0 |
| 10 K | -138.3 | -136.6 | -134.9 | -133.2 | -128.3 |
| 100 K | -140.5 | -140.5 | -140.6 | -140.7 | -140.9 |
| 1 M | -154.2 | -154.2 | -154.3 | -154.3 | -154.4 |
| 10 M | -161.7 | -161.8 | -161.7 | -161.7 | -161.8 |
| 20 M | -162.5 | -162.5 | -162.4 | -162.5 | -162.6 |


| | | | | |
|---|---------------|--|--------------|--------------------|
|  | Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| | Type: | Performance report | Rev: | 1.2 |
| | Orig: | | Date: | September 07, 2018 |

Table 2: Integrated Phase jitter

| Parameter | Units | Pull range (ppm) |
|--|---------|------------------|
| | | ±50 to ±400 |
| Integrated Phase jitter (1.875 MHz - 20 MHz) | fs, rms | 119 |
| Integrated Phase jitter (12 kHz - 20 MHz) | fs, rms | 216 |

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.


| | | | | |
|---|---------------|--|--------------|--------------------|
|  | Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| | Type: | Performance report | Rev: | 1.2 |
| | Orig: | | Date: | September 07, 2018 |



Figure 2: Output waveform, 2.5 V



Figure 3: Output waveform, 3.3 V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.



| | | | |
|---------------|--|--------------|--------------------|
| Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| Type: | Performance report | Rev: | 1.2 |
| Orig: | | Date: | September 07, 2018 |

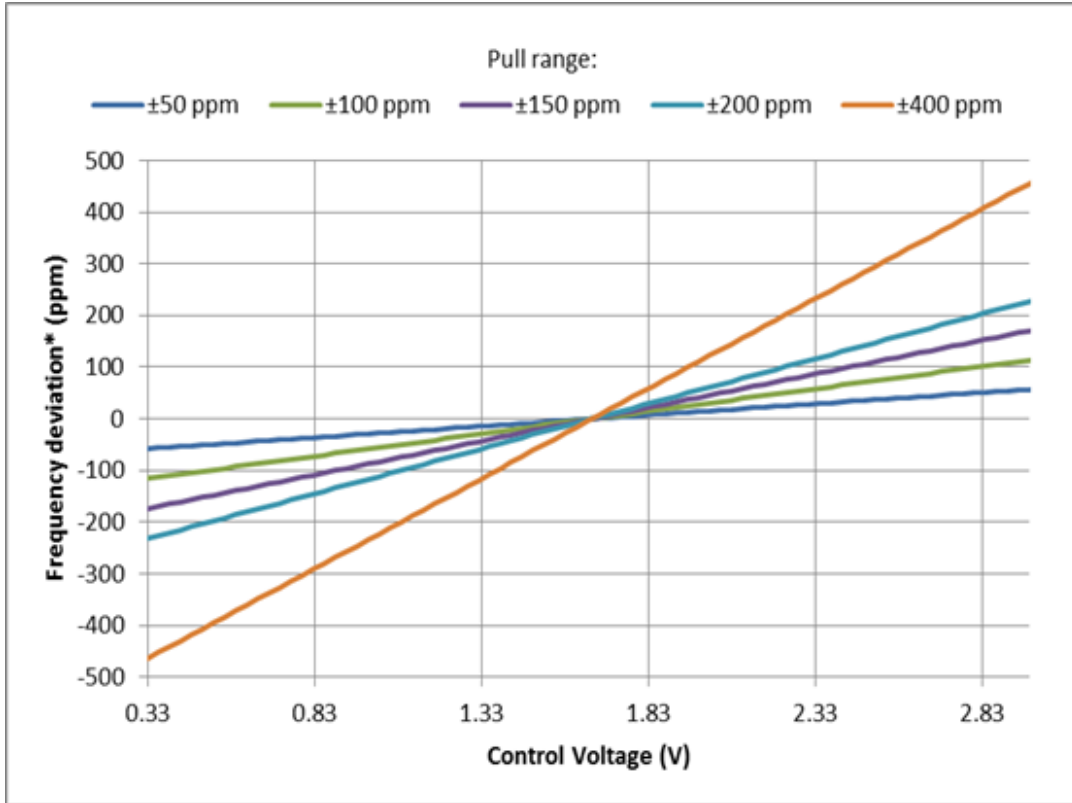


Figure 4: Frequency pull characteristic

| | | | | |
|---------------|---------------|--|--------------|--------------------|
| SiTime | Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| | Type: | Performance report | Rev: | 1.2 |
| | Orig: | | Date: | September 07, 2018 |

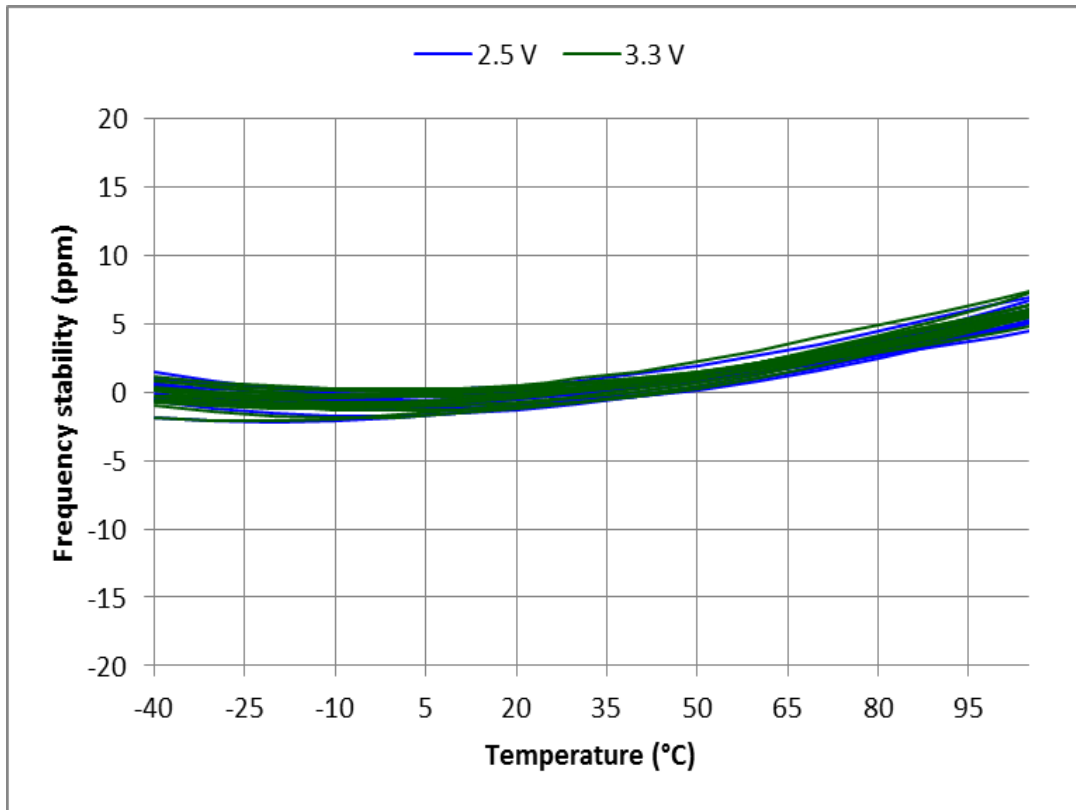


Figure 5: Frequency stability* over temperature, 2.5 V – 3.3 V, 30 devices

*SiT3372 frequency stability is independent of output frequency.

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.



| | | | | |
|---|---------------|--|--------------|--------------------|
|  | Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| | Type: | Performance report | Rev: | 1.2 |
| | Orig: | | Date: | September 07, 2018 |

Table 3: Summary performance data

| Parameter | Units | Voltage | |
|--|-----------|---------|-------|
| | | 2.5 V | 3.3 V |
| Period jitter | ps, rms | 1.02 | 1.06 |
| Period jitter (sample size 10,000 cycles) | ps, pk-pk | 7.99 | 7.80 |
| Duty cycle | % | 50.0 | 50.0 |
| Rise time (20% - 80%) | ps | 369 | 365 |
| Fall time (80% - 20%) | ps | 367 | 364 |
| Differential voltage swing | V | 1.37 | 1.44 |
| Current consumption (no load, output enabled) | mA | 82.3 | 82.5 |
| Current consumption (no load, output disabled) | mA | 57.5 | 57.5 |

| | | | | |
|---|---------------|--|--------------|--------------------|
|  | Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| | Type: | Performance report | Rev: | 1.2 |
| | Orig: | | Date: | September 07, 2018 |


Test description

Conditions:

- Frequency: 70.656 MHz
- VDD: 2.5 V, 3.3 V
- Pull range: ± 50 ppm, ± 100 ppm, ± 150 ppm, ± 200 ppm, ± 400 ppm
- Temperature: 25 °C

Equipment:

| Model | Measurement / Purpose |
|---------------------------------------|---|
| Keysight DSA90604A (6 GHz, 20 Gsps) | Period jitter, output amplitude, rise/fall time, duty cycle |
| Keysight 5052B Signal Source Analyzer | Phase noise, integrated phase jitter |
| Keysight 34980A | Power supply current |
| Keysight E3631A | Power supply |
| Keysight 53230A | Frequency |

| | | | | |
|---|---------------|--|--------------|--------------------|
|  | Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| | Type: | Performance report | Rev: | 1.2 |
| | Orig: | | Date: | September 07, 2018 |

Setup

Waveform

For waveform parameters measurement (rise/fall time, differential swing, duty cycle), both DUT outputs are terminated with 30 Ω series and 50 Ω to GND. Output signals are measured using Keysight 1134B active probe with Keysight N5425B probe head. All measurements are applied to the differential waveform. Figure 6 shows test setup diagram for waveform parameters measurement.

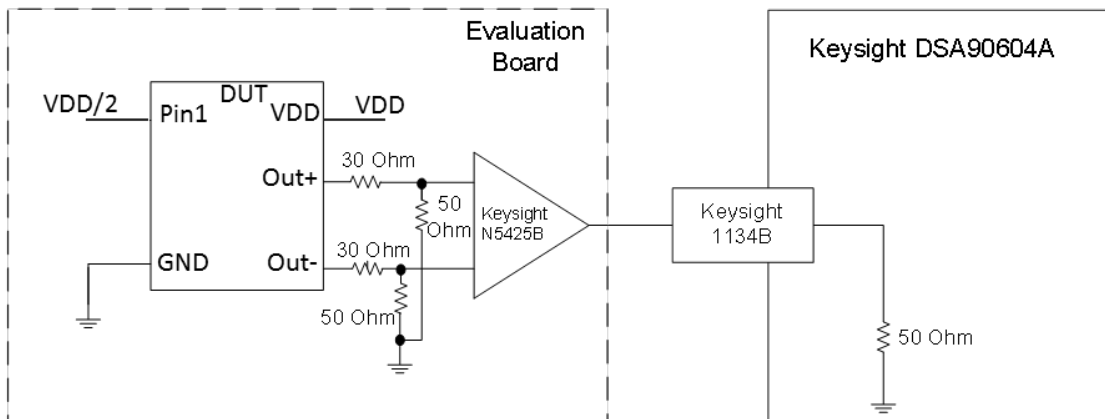


Figure 6. Test setup for measuring waveform parameters (rise/fall time, differential swing, duty cycle)

Period Jitter

For period jitter measurement output is terminated with 30 Ω series and 50 Ω to GND at the input of hi-speed comparator (ADCMP581). AC coupled comparator's output is connected to oscilloscope channel. Figure 7 shows test setup diagram for period jitter measurement.

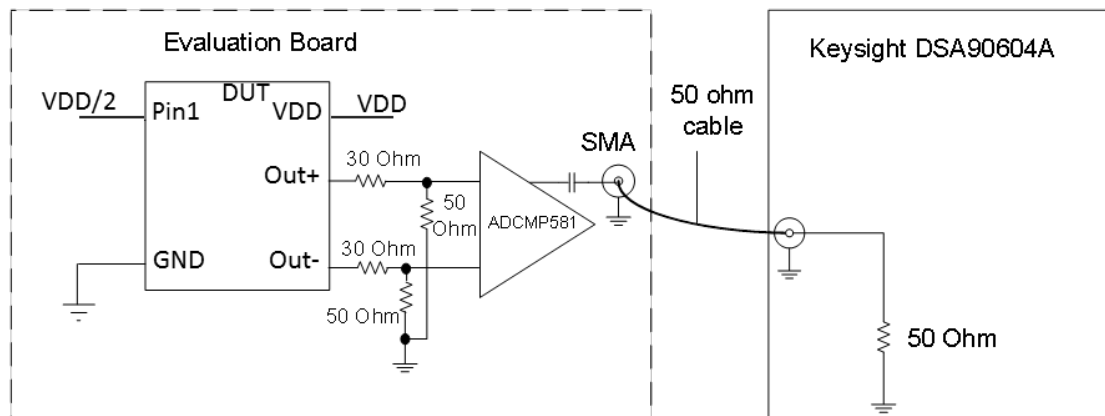



Figure 7. Test setup for measuring period jitter

| | | | | |
|---|---------------|--|--------------|--------------------|
|  | Title: | Performance report for SiT3372, 70.656 MHz, HCSL | | |
| | Type: | Performance report | Rev: | 1.2 |
| | Orig: | | Date: | September 07, 2018 |

Phase noise

For phase noise measurements, differential signal is converted to single-ended using impedance matching transformer. Transformer's output is connected to measurement instrument. Output is also terminated with 30 Ω series at the source side. Figure 8 shows test setup diagram for phase noise measurement.

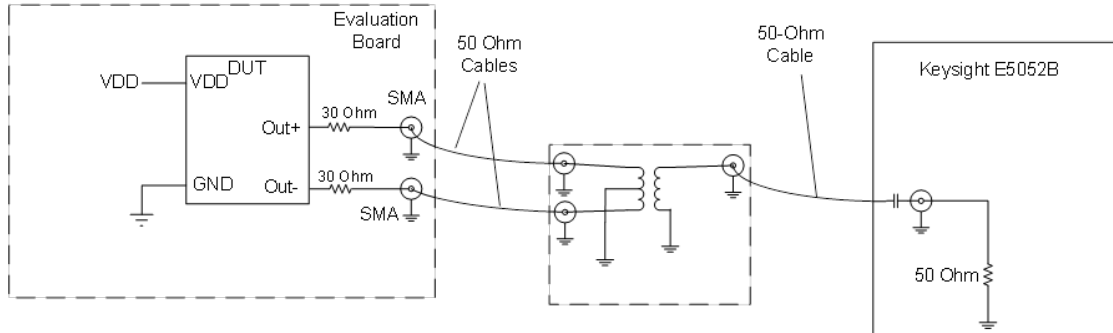


Figure 8. Test setup for measuring phase noise.

Current consumption

For Current consumption measurement device output is floating. For frequency measurement differential-to-single-ended converter is used.

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.