	Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
	Type:	Performance report	Rev:	1.2
	Orig:		Date:	September 12, 2018

Performance report for SiT3372 - 30.72 MHz, LVDS

This performance report contains the following data:

- Phase noise
- Random phase jitter
- Output waveforms
- Pull range linearity
- Frequency stability over temperature
- Period jitter
- Duty cycle
- Rise/Fall time
- Amplitude
- Current consumption



Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
Type:	Performance report	Rev:	1.2
Orig:		Date:	September 12, 2018

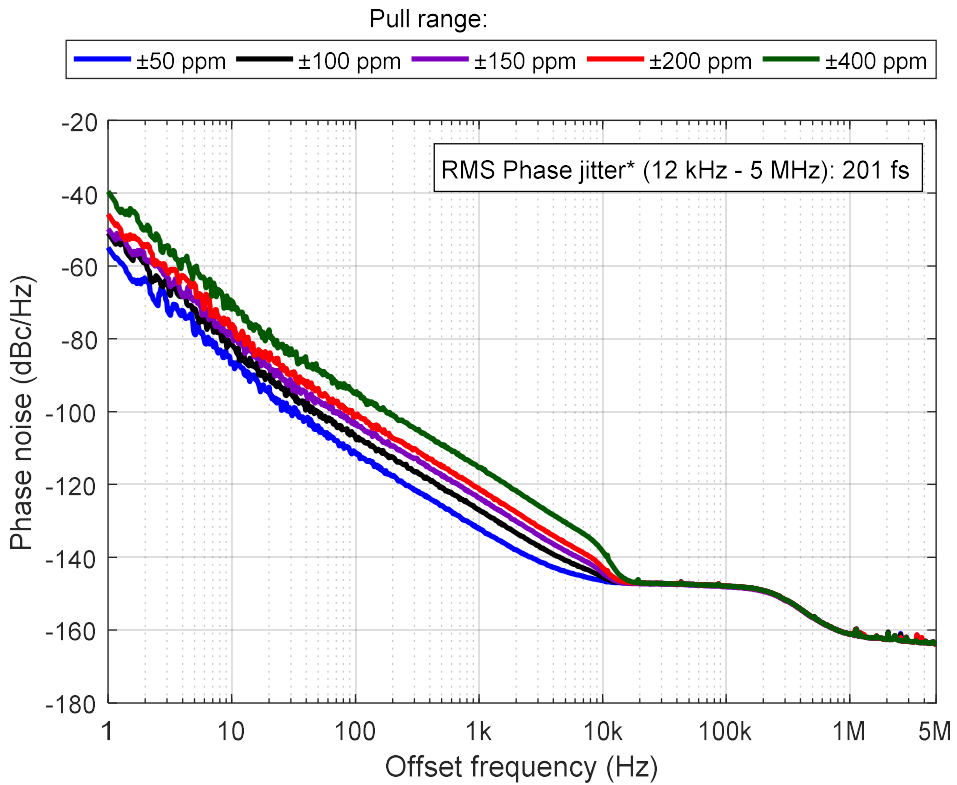


Figure 1: Phase noise, 3.3 V

**Integrated phase jitter value applies for ±50 ppm to ±400 ppm pull ranges*

Table 1: Phase noise

Phase noise dBc/Hz					
Frequency offset (Hz)	Pull range (ppm)				
	±50	±100	±150	±200	±400
1	-55.0	-50.9	-49.8	-45.8	-39.5
10	-86.6	-81.3	-77.2	-76.8	-71.9
100	-111.2	-107.2	-103.6	-100.9	-95.0
1 K	-132.2	-126.9	-123.7	-121.1	-115.4
10 K	-146.4	-145.4	-144.3	-142.8	-138.4
100 K	-147.9	-147.9	-148.1	-147.9	-147.9
1 M	-161.1	-161.1	-161.2	-161.1	-161.1
5 M	-163.7	-163.7	-163.8	-163.8	-163.7


	Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
	Type:	Performance report	Rev:	1.2
	Orig:		Date:	September 12, 2018

Table 2: Integrated Phase jitter

Parameter	Units	Pull range (ppm)
		±50 to ±400
Integrated Phase jitter (1.875 MHz - 5 MHz)	fs, rms	91
Integrated Phase jitter (12 kHz - 5 MHz)	fs, rms	201

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.


	Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
	Type:	Performance report	Rev:	1.2
	Orig:		Date:	September 12, 2018



Figure 2: Output waveform, 2.5 V



Figure 3: Output waveform, 3.3 V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.



Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
Type:	Performance report	Rev:	1.2
Orig:		Date:	September 12, 2018

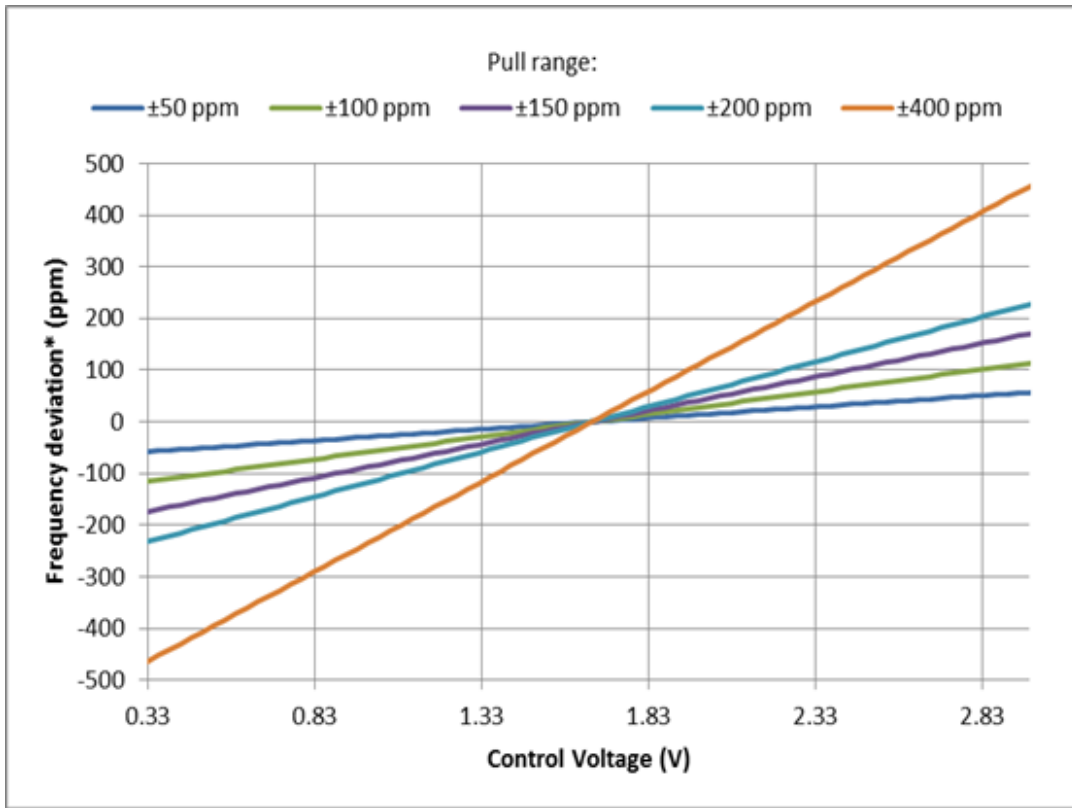


Figure 4: Frequency pull characteristic

SiTime	Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
	Type:	Performance report	Rev:	1.2
	Orig:		Date:	September 12, 2018

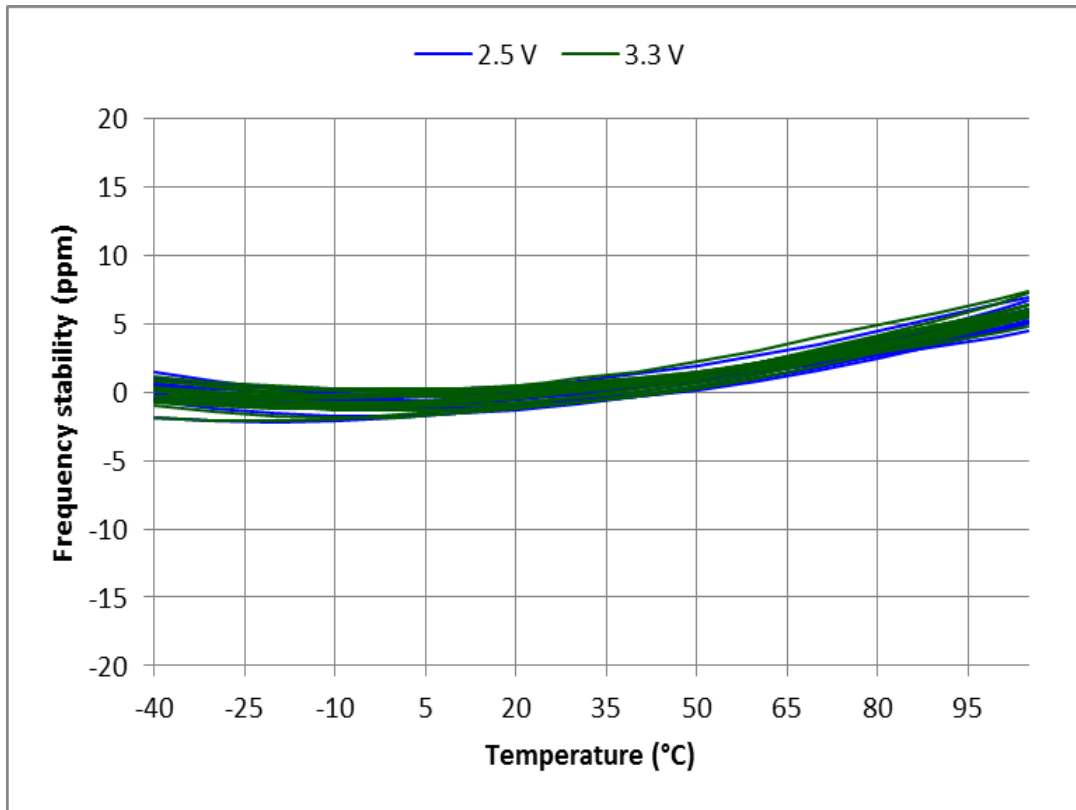


Figure 5: Frequency stability* over temperature, 2.5 V – 3.3 V, 30 devices

*SiT3372 frequency stability is independent of output frequency.

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.



	Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
	Type:	Performance report	Rev:	1.2
	Orig:		Date:	September 12, 2018

Table 3: Summary performance data

Parameter	Units	Voltage	
		2.5 V	3.3 V
Period jitter	ps, rms	0.73	0.73
Period jitter (sample size 10,000 cycles)	ps, pk-pk	5.72	5.64
Duty cycle	%	50.0	50.0
Rise time (20% - 80%)	ps	332	330
Fall time (80% - 20%)	ps	320	319
Differential voltage swing	V	0.68	0.68
Current consumption (no load, output enabled)	mA	73.1	73.3
Current consumption (no load, output disabled)	mA	58.3	58.4

	Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
	Type:	Performance report	Rev:	1.2
	Orig:		Date:	September 12, 2018


Test description

Conditions:

- Frequency: 30.72 MHz
- VDD: 2.5 V, 3.3 V
- Pull range: ± 50 ppm, ± 100 ppm, ± 150 ppm, ± 200 ppm, ± 400 ppm
- Temperature: 25 °C

Equipment:

Model	Measurement / Purpose
Keysight DSA90604A (6 GHz, 20 Gbps)	Period jitter, output amplitude, rise/fall time, duty cycle
Keysight 5052B Signal Source Analyzer	Phase noise, integrated phase jitter
Keysight 34980A	Power supply current
Keysight E3631A	Power supply
Keysight 53230A	Frequency

	Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
	Type:	Performance report	Rev:	1.2
	Orig:		Date:	September 12, 2018

Setup

Waveform

For waveform parameters measurement (rise/fall time, differential swing, duty cycle), both DUT outputs are terminated with 100 Ω differential. Output signals are measured using Keysight 1134B active probe with Keysight N5425B probe head. All measurements are applied to the differential waveform. Figure 6 shows test setup diagram for waveform parameters measurement.

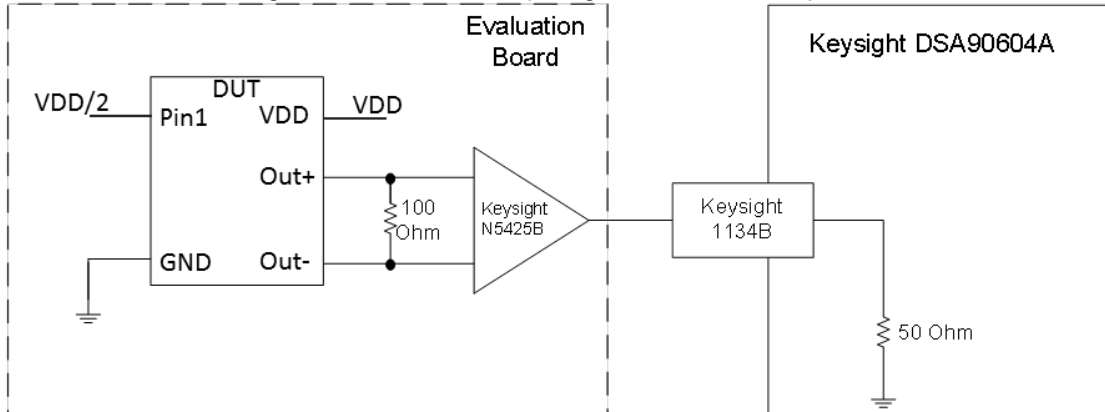


Figure 6. Test setup for measuring waveform parameters (rise/fall time, differential swing, duty cycle)

Period Jitter

For period jitter measurement outputs are connected through AC-coupling capacitors to the oscilloscope channels. Signals are subtracted inside the oscilloscope. All measurements applied to differential waveform. Figure 7 shows test setup diagram for period jitter measurement.

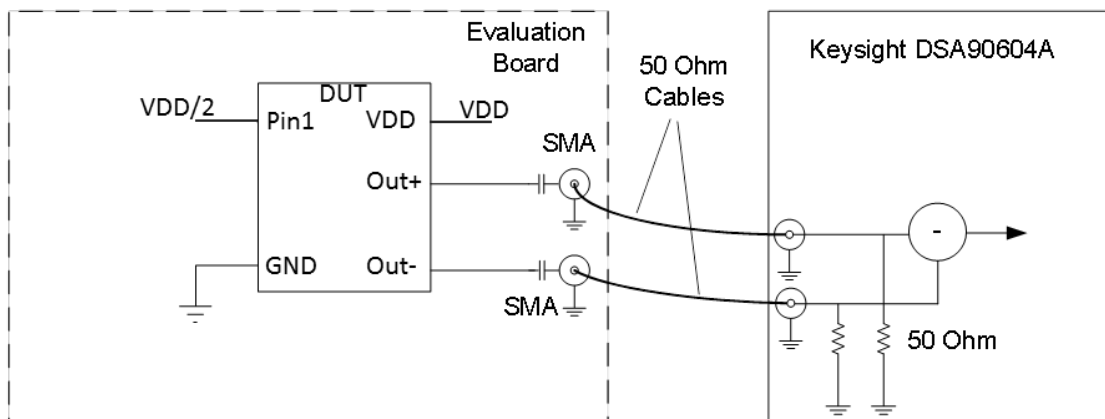



Figure 7. Test setup for measuring period jitter

	Title:	Performance report for SiT3372, 30.72 MHz, LVDS		
	Type:	Performance report	Rev:	1.2
	Orig:		Date:	September 12, 2018

Phase noise

For phase noise measurements, differential signal is converted to single-ended using impedance matching transformer. Transformer's output is connected to measurement instrument. Figure 8 shows test setup diagram for phase noise measurement.

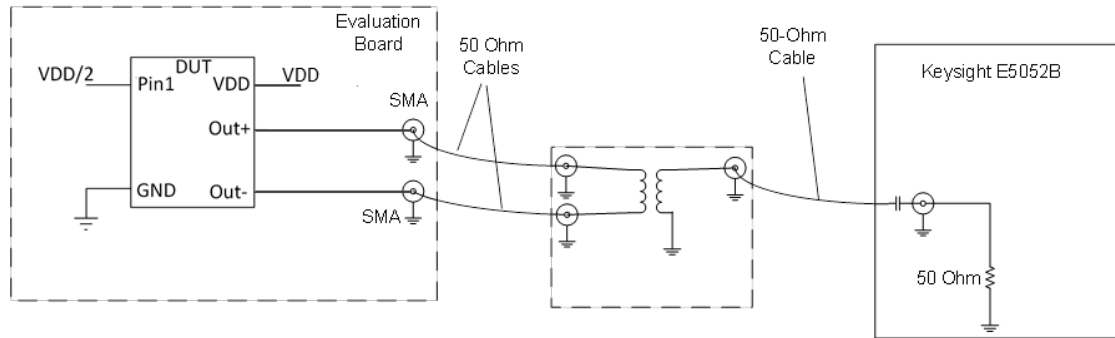


Figure 8. Test setup for measuring phase noise.

Current consumption

For Current consumption measurement device output is floating. For frequency measurement differential-to-single-ended converter is used.