	<b>Title:</b>	<b>Performance report for SiT3372, 148.351648 MHz, LVDS</b>		
	<b>Type:</b>	<b>Performance report</b>	<b>Rev:</b>	<b>1.2</b>
	<b>Orig:</b>		<b>Date:</b>	<b>September 12, 2018</b>

## Performance report for SiT3372 - 148.351648 MHz, LVDS

### This performance report contains the following data:

- Phase noise
- Random phase jitter
- Output waveforms
- Pull range linearity
- Frequency stability over temperature
- Period jitter
- Duty cycle
- Rise/Fall time
- Amplitude
- Current consumption



<b>Title:</b>	Performance report for SiT3372, 148.351648 MHz, LVDS		
<b>Type:</b>	Performance report	<b>Rev:</b>	1.2
<b>Orig:</b>		<b>Date:</b>	September 12, 2018

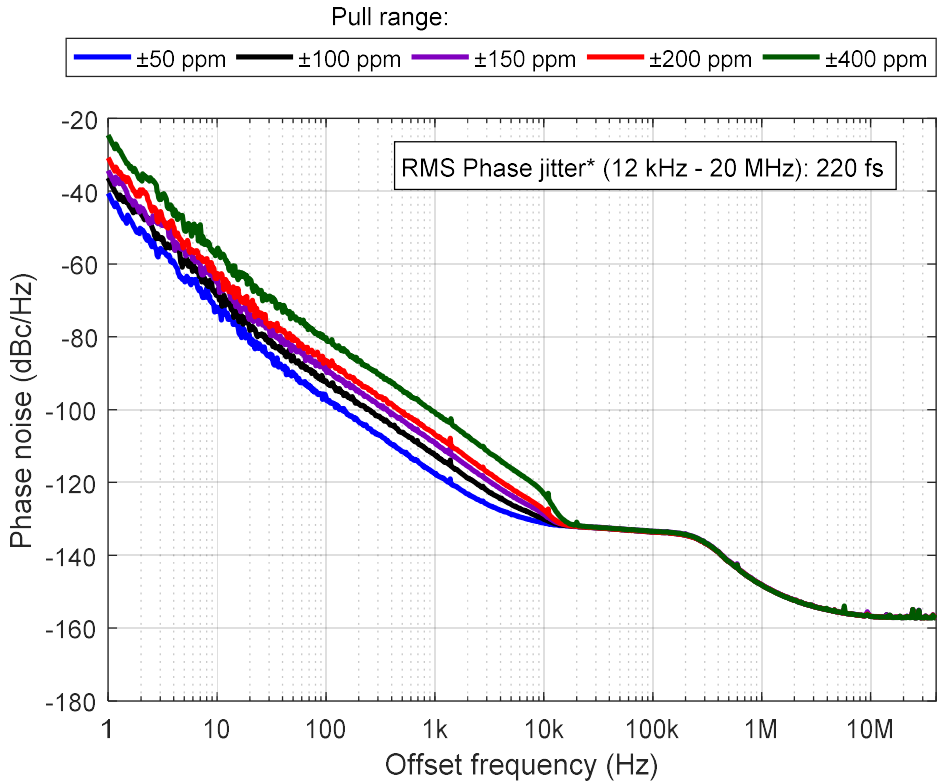


Figure 1: Phase noise, 3.3 V

*\*Integrated phase jitter value applies for ±50 ppm to ±400 ppm pull ranges*

Table 1: Phase noise

Phase noise dBc/Hz					
Frequency offset (Hz)	Pull range (ppm)				
	±50	±100	±150	±200	±400
1	-40.6	-36.4	-34.4	-30.8	-24.6
10	-73.1	-67.2	-64.0	-64.0	-55.8
100	-96.6	-92.1	-88.8	-86.7	-80.2
1 K	-117.6	-112.5	-109.1	-106.9	-100.8
10 K	-131.1	-130.0	-128.8	-127.5	-123.1
100 K	-133.6	-133.6	-133.4	-133.6	-133.4
1 M	-148.1	-148.2	-148.1	-148.1	-148.1
10 M	-156.8	-156.8	-156.8	-156.8	-156.8
40 M	-157.1	-157.2	-157.1	-157.1	-157.2


	<b>Title:</b>	Performance report for SiT3372, 148.351648 MHz, LVDS		
	<b>Type:</b>	Performance report	<b>Rev:</b>	1.2
	<b>Orig:</b>		<b>Date:</b>	September 12, 2018

Table 2: Integrated Phase jitter

Parameter	Units	Pull range (ppm)
		±50 to ±400
Integrated Phase jitter (1.875 MHz - 20 MHz)	fs, rms	100
Integrated Phase jitter (12 kHz - 20 MHz)	fs, rms	220


	<b>Title:</b>	Performance report for SiT3372, 148.351648 MHz, LVDS		
	<b>Type:</b>	Performance report	<b>Rev:</b>	1.2
	<b>Orig:</b>		<b>Date:</b>	September 12, 2018



Figure 2: Output waveform, 2.5 V



Figure 3: Output waveform, 3.3 V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.



<b>Title:</b>	Performance report for SiT3372, 148.351648 MHz, LVDS		
<b>Type:</b>	Performance report	<b>Rev:</b>	1.2
<b>Orig:</b>		<b>Date:</b>	September 12, 2018

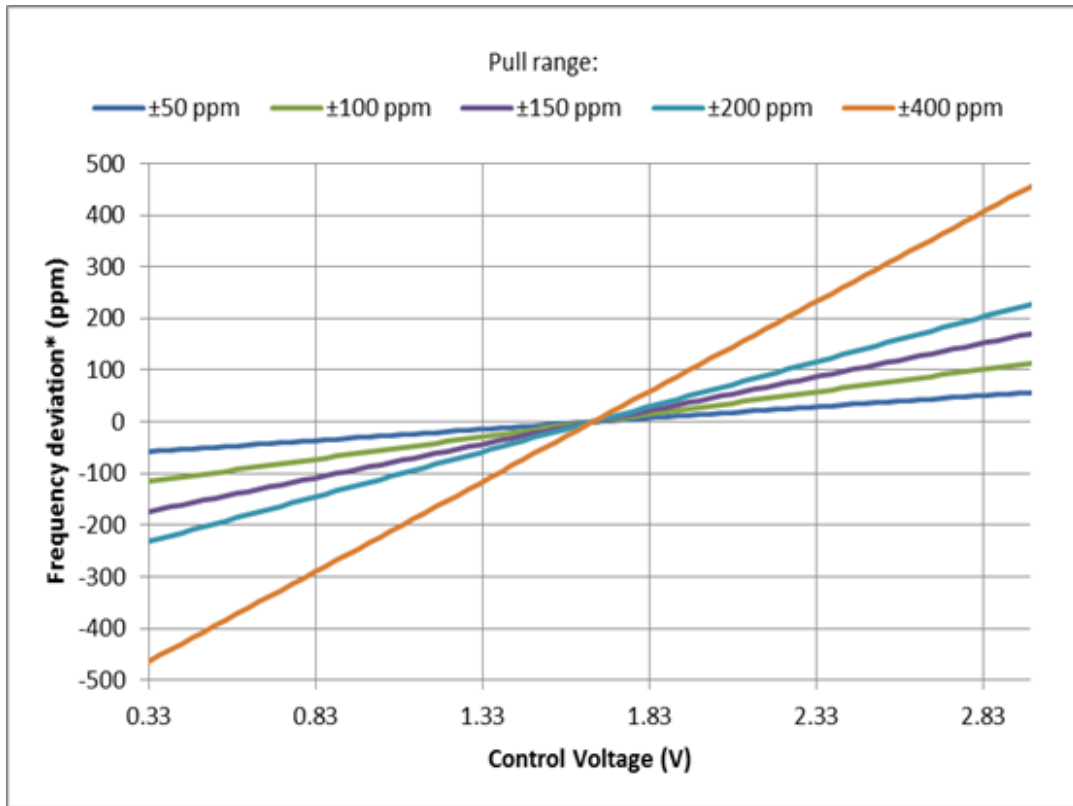


Figure 4: Frequency pull characteristic

<b>SiTime</b>	<b>Title:</b>	Performance report for SiT3372, 148.351648 MHz, LVDS		
	<b>Type:</b>	Performance report	<b>Rev:</b>	1.2
	<b>Orig:</b>		<b>Date:</b>	September 12, 2018

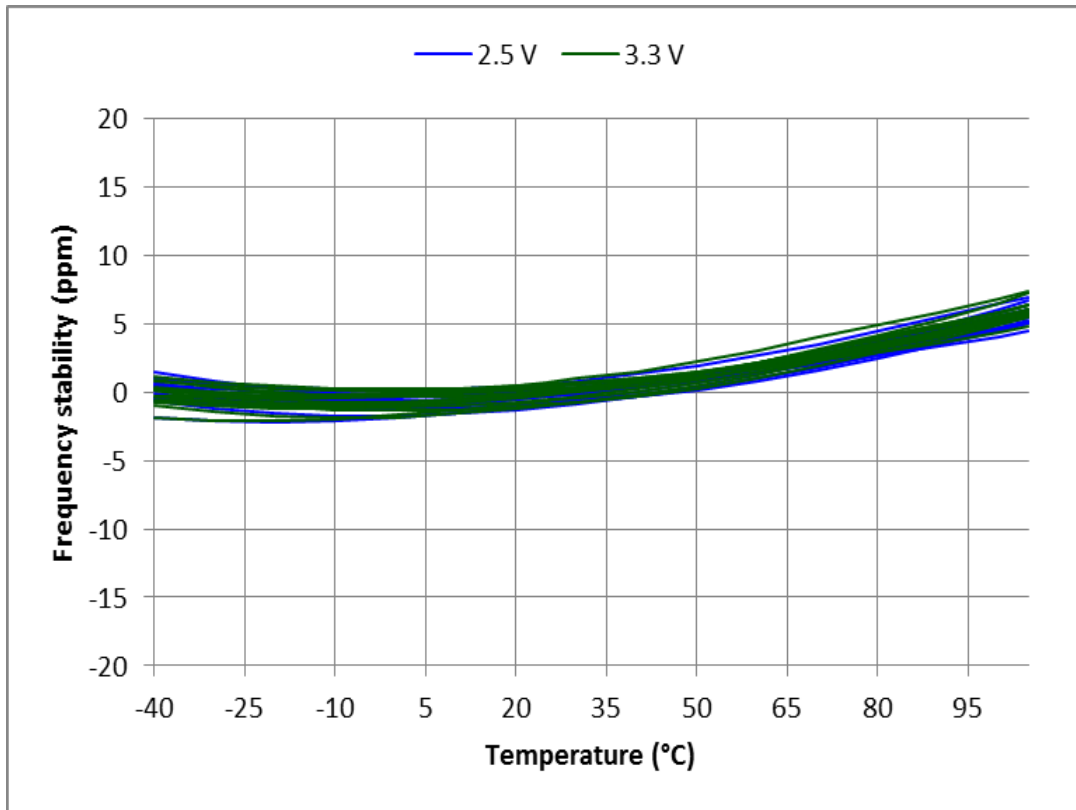


Figure 5: Frequency stability\* over temperature, 2.5 V – 3.3 V, 30 devices

\*SiT3372 frequency stability is independent of output frequency.

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.



	<b>Title:</b>	<b>Performance report for SiT3372, 148.351648 MHz, LVDS</b>		
	<b>Type:</b>	<b>Performance report</b>	<b>Rev:</b>	<b>1.2</b>
	<b>Orig:</b>		<b>Date:</b>	<b>September 12, 2018</b>

Table 3: Summary performance data

Parameter	Units	Voltage	
		2.5 V	3.3 V
Period jitter	ps, rms	0.82	0.82
Period jitter (sample size 10,000 cycles)	ps, pk-pk	6.16	6.22
Duty cycle	%	50.0	50.2
Rise time (20% - 80%)	ps	398	401
Fall time (80% - 20%)	ps	385	376
Differential voltage swing	V	0.81	0.80
Current consumption (no load, output enabled)	mA	75.4	75.5
Current consumption (no load, output disabled)	mA	57.9	57.9

	<b>Title:</b>	Performance report for SiT3372, 148.351648 MHz, LVDS		
	<b>Type:</b>	Performance report	<b>Rev:</b>	1.2
	<b>Orig:</b>		<b>Date:</b>	September 12, 2018

## Test description


### Conditions:

- Frequency: 148.351648 MHz
- VDD: 2.5 V, 3.3 V
- Pull range:  $\pm 50$  ppm,  $\pm 100$  ppm,  $\pm 150$  ppm,  $\pm 200$  ppm,  $\pm 400$  ppm
- Temperature: 25 °C

### Equipment:

Model	Measurement / Purpose
Keysight DSA90604A (6 GHz, 20 Gbps)	Period jitter, output amplitude, rise/fall time, duty cycle
Keysight 5052B Signal Source Analyzer	Phase noise, integrated phase jitter
Keysight 34980A	Power supply current
Keysight E3631A	Power supply
Keysight 53230A	Frequency



	<b>Title:</b>	Performance report for SiT3372, 148.351648 MHz, LVDS		
	<b>Type:</b>	Performance report	<b>Rev:</b>	1.2
	<b>Orig:</b>		<b>Date:</b>	September 12, 2018

## Setup

### Waveform

For waveform parameters measurement (rise/fall time, differential swing, duty cycle), both DUT outputs are terminated with 100  $\Omega$  differential. Output signals are measured using Keysight 1134B active probe with Keysight N5425B probe head. All measurements are applied to the differential waveform. Figure 6 shows test setup diagram for waveform parameters measurement.

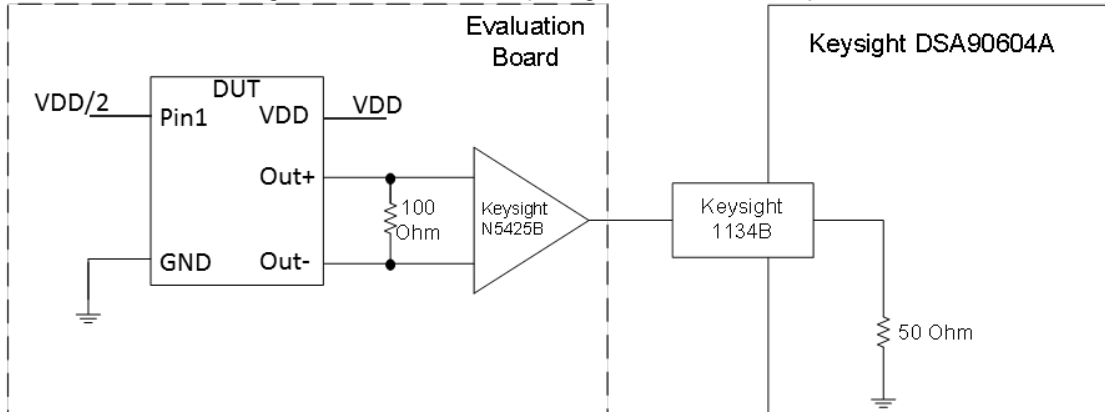


Figure 6. Test setup for measuring waveform parameters (rise/fall time, differential swing, duty cycle)

### Period Jitter

For period jitter measurement outputs are connected through AC-coupling capacitors to the oscilloscope channels. Signals are subtracted inside the oscilloscope. All measurements applied to differential waveform. Figure 7 shows test setup diagram for period jitter measurement.

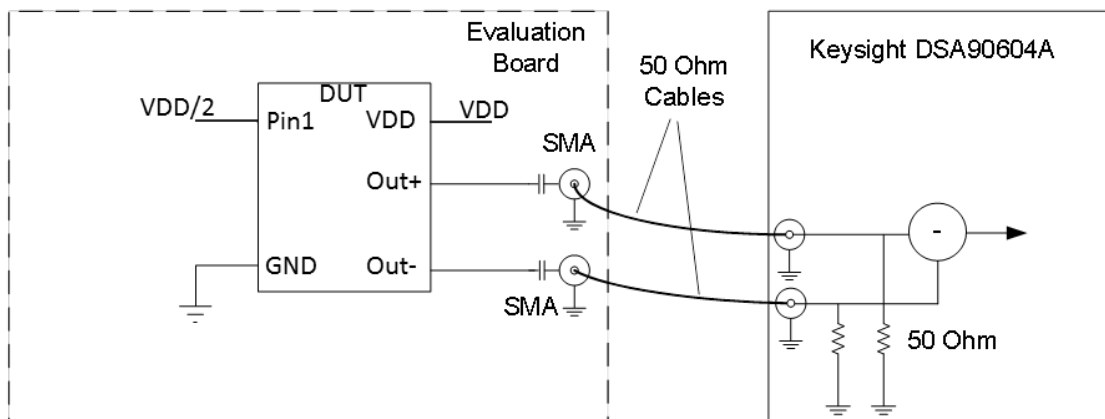



Figure 7. Test setup for measuring period jitter

	<b>Title:</b>	Performance report for SiT3372, 148.351648 MHz, LVDS		
	<b>Type:</b>	Performance report	<b>Rev:</b>	1.2
	<b>Orig:</b>		<b>Date:</b>	September 12, 2018

**Phase noise**

For phase noise measurements, differential signal is converted to single-ended using impedance matching transformer. Transformer's output is connected to measurement instrument. Figure 8 shows test setup diagram for phase noise measurement.

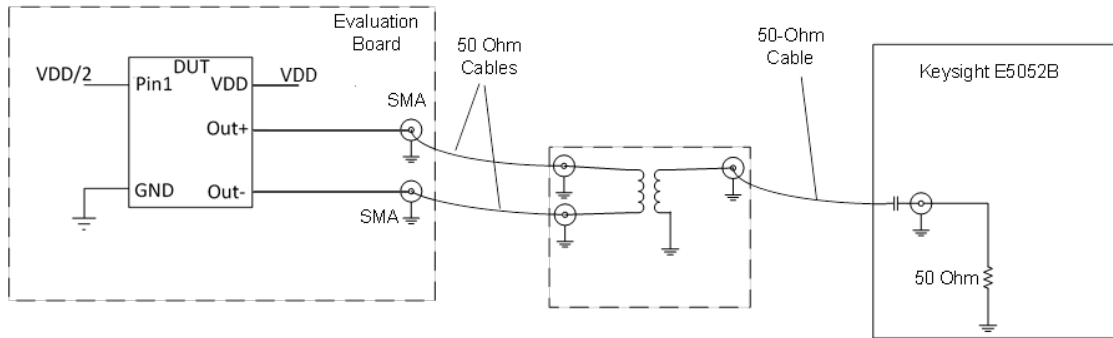


Figure 8. Test setup for measuring phase noise.

**Current consumption**

For Current consumption measurement device output is floating. For frequency measurement differential-to-single-ended converter is used.