



|   |               |   |              |                           |
|---|---------------|---|--------------|---------------------------|
|  | <b>Title:</b> | <b>Performance report for SiT3372, 155.52 MHz, LVDS</b> |              |                           |
|   | <b>Type:</b>  | <b>Performance report</b>                               | <b>Rev:</b>  | <b>1.2</b>                |
|   | <b>Orig:</b>  |   | <b>Date:</b> | <b>September 12, 2018</b> |

## Performance report for SiT3372 - 155.52 MHz, LVDS

**This performance report contains the following data:**

- Phase noise
- Random phase jitter
- Output waveforms
- Pull range linearity
- Frequency stability over temperature
- Period jitter
- Duty cycle
- Rise/Fall time
- Amplitude
- Current consumption

|   |   |                    |       |                    |
|---|---|--------------------|-------|--------------------|
|  | Title: Performance report for SiT3372, 155.52 MHz, LVDS |                    |       |                    |
|   | Type:   | Performance report | Rev:  | 1.2                |
|   | Orig:   |                    | Date: | September 12, 2018 |

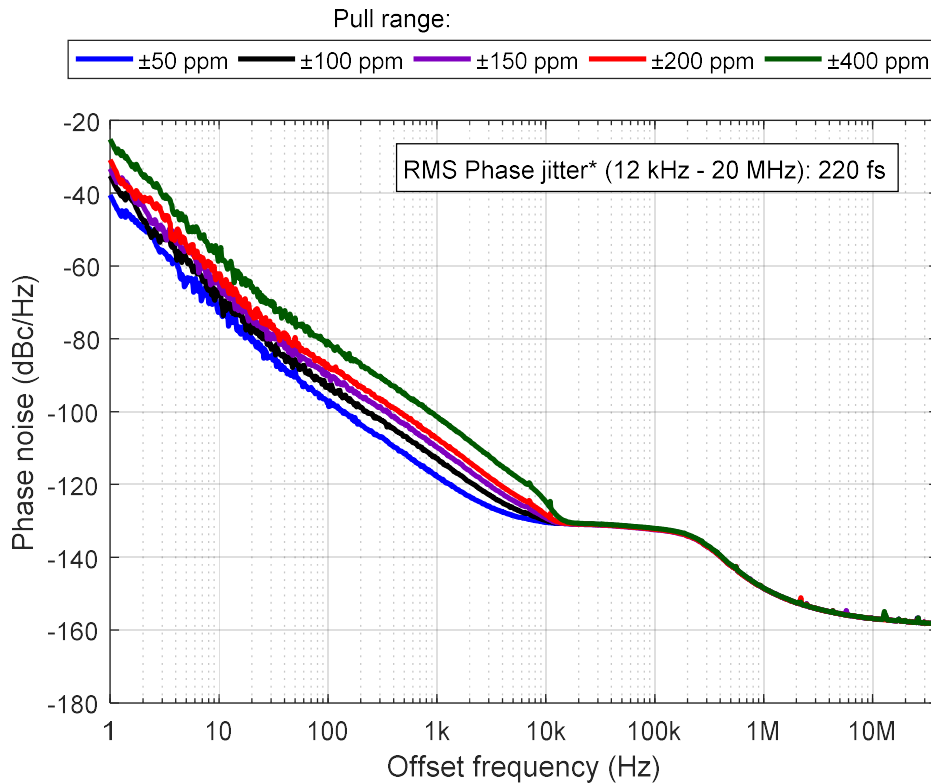


Figure 1: Phase noise, 3.3 V

*\*Integrated phase jitter value applies for ±50 ppm to ±400 ppm pull ranges*

Table 1: Phase noise

| Phase noise dBc/Hz       |                  |        |        |        |        |
|--------------------------|------------------|--------|--------|--------|--------|
| Frequency offset<br>(Hz) | Pull range (ppm) |        |        |        |        |
|                          | ±50              | ±100   | ±150   | ±200   | ±400   |
| 1                        | -40.5            | -35.2  | -33.3  | -30.9  | -25.2  |
| 10                       | -72.4            | -68.1  | -65.1  | -62.6  | -57.5  |
| 100                      | -97.6            | -92.8  | -89.9  | -87.4  | -81.4  |
| 1 K                      | -117.8           | -112.8 | -109.8 | -107.3 | -101.4 |
| 10 K                     | -130.3           | -129.9 | -129.2 | -128.3 | -124.8 |
| 100 K                    | -132.2           | -132.2 | -132.4 | -132.3 | -132.1 |
| 1 M                      | -148.5           | -148.5 | -148.5 | -148.5 | -148.4 |
| 10 M                     | -156.8           | -156.8 | -156.8 | -156.8 | -156.8 |
| 40 M                     | -158.1           | -158.1 | -158.1 | -158.1 | -158.1 |


|   |               |   |              |                           |
|---|---------------|---|--------------|---------------------------|
|  | <b>Title:</b> | <b>Performance report for SiT3372, 155.52 MHz, LVDS</b> |              |                           |
|   | <b>Type:</b>  | <b>Performance report</b>                               | <b>Rev:</b>  | <b>1.2</b>                |
|   | <b>Orig:</b>  |   | <b>Date:</b> | <b>September 12, 2018</b> |

Table 2: Integrated Phase jitter

| Parameter                                    | Units   | Pull range (ppm) |
|--|---------|------------------|
|  |         | ±50 to ±400      |
| Integrated Phase jitter (1.875 MHz - 20 MHz) | fs, rms | 94               |
| Integrated Phase jitter (12 kHz - 20 MHz)    | fs, rms | 220              |


|   |               |  |              |                    |
|---|---------------|--|--------------|--------------------|
|  | <b>Title:</b> | Performance report for SiT3372, 155.52 MHz, LVDS |              |                    |
|   | <b>Type:</b>  | Performance report                               | <b>Rev:</b>  | 1.2                |
|   | <b>Orig:</b>  |  | <b>Date:</b> | September 12, 2018 |



Figure 2: Output waveform, 2.5 V



Figure 3: Output waveform, 3.3 V

|               |               |  |              |                    |
|---------------|---------------|--|--------------|--------------------|
| <b>SiTime</b> | <b>Title:</b> | Performance report for SiT3372, 155.52 MHz, LVDS |              |                    |
|               | <b>Type:</b>  | Performance report                               | <b>Rev:</b>  | 1.2                |
|               | <b>Orig:</b>  |  | <b>Date:</b> | September 12, 2018 |

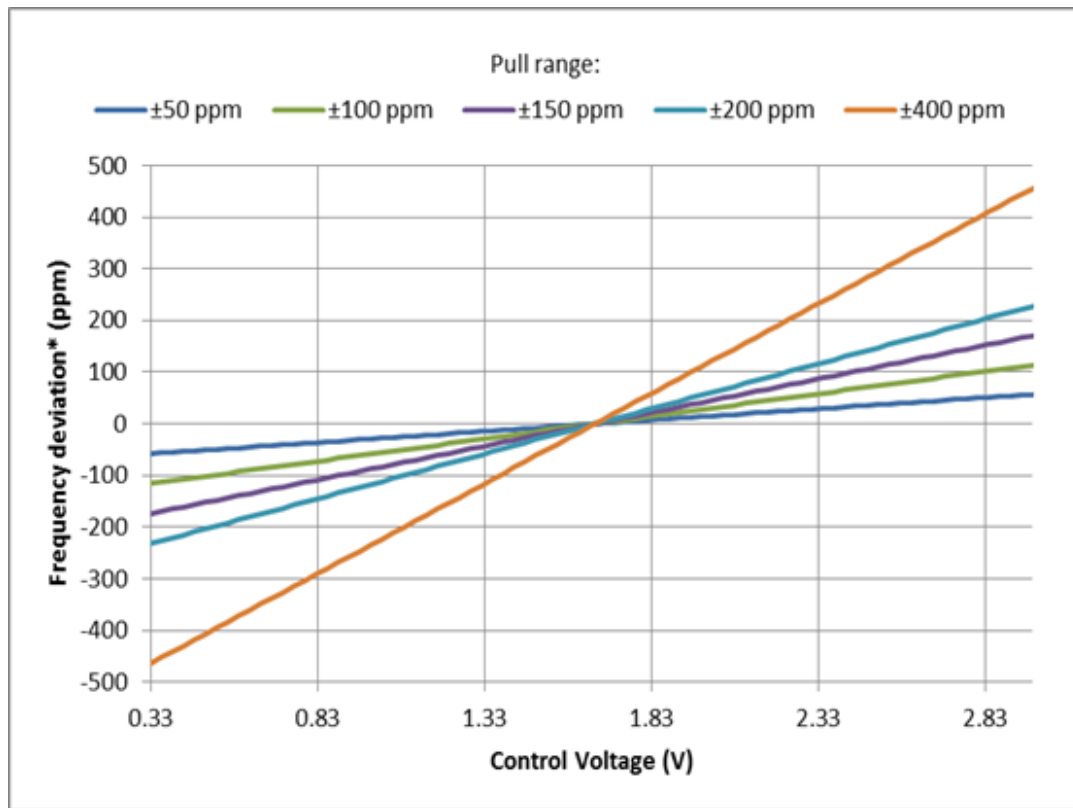


Figure 4: Frequency pull characteristic

|               |               |  |              |                    |
|---------------|---------------|--|--------------|--------------------|
| <b>SiTime</b> | <b>Title:</b> | Performance report for SiT3372, 155.52 MHz, LVDS |              |                    |
|               | <b>Type:</b>  | Performance report                               | <b>Rev:</b>  | 1.2                |
|               | <b>Orig:</b>  |  | <b>Date:</b> | September 12, 2018 |

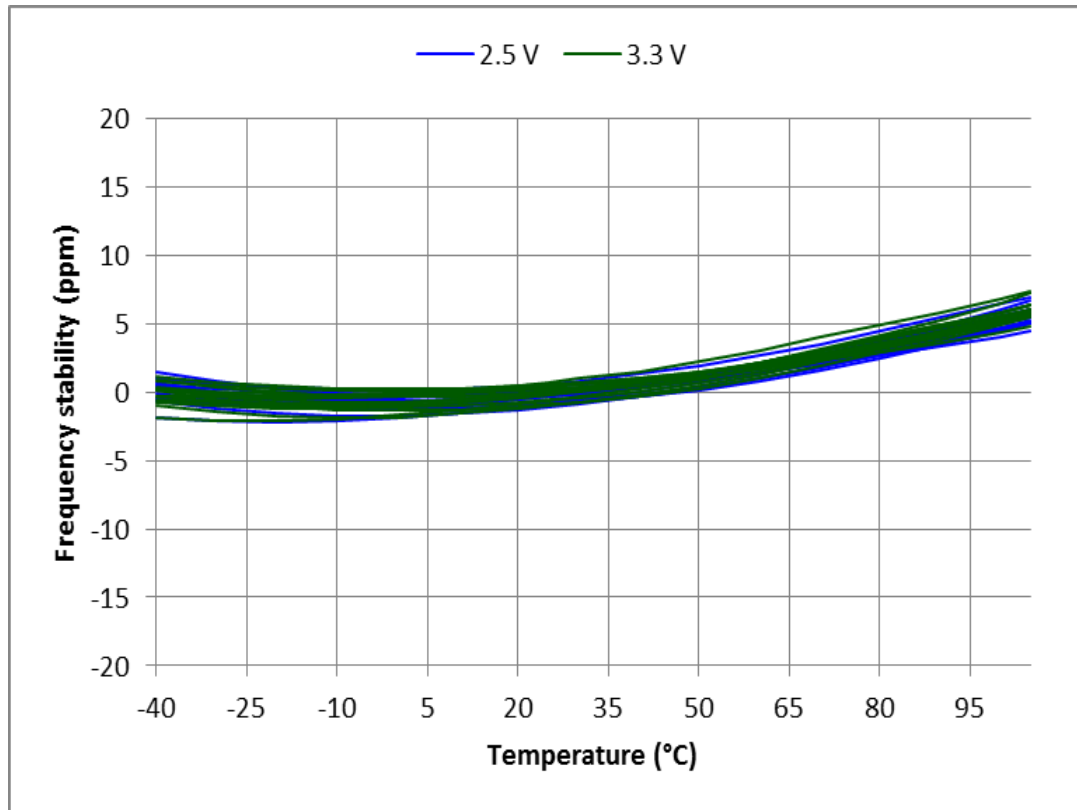


Figure 5: Frequency stability\* over temperature, 2.5 V – 3.3 V, 30 devices

*\*SiT3372 frequency stability is independent of output frequency.*



|   |               |   |              |                           |
|---|---------------|---|--------------|---------------------------|
|  | <b>Title:</b> | <b>Performance report for SiT3372, 155.52 MHz, LVDS</b> |              |                           |
|   | <b>Type:</b>  | <b>Performance report</b>                               | <b>Rev:</b>  | <b>1.2</b>                |
|   | <b>Orig:</b>  |   | <b>Date:</b> | <b>September 12, 2018</b> |

Table 3: Summary performance data

| Parameter                                      | Units     | Voltage |       |
|--|-----------|---------|-------|
|  |           | 2.5 V   | 3.3 V |
| Period jitter                                  | ps, rms   | 0.75    | 0.75  |
| Period jitter (simple size 10,000 cycles)      | ps, pk-pk | 5.66    | 5.84  |
| Duty cycle                                     | %         | 49.9    | 49.8  |
| Rise time (20% - 80%)                          | ps        | 400     | 392   |
| Fall time (80% - 20%)                          | ps        | 397     | 397   |
| Differential voltage swing                     | V         | 0.83    | 0.82  |
| Current consumption (no load, output enabled)  | mA        | 75.4    | 75.4  |
| Current consumption (no load, output disabled) | mA        | 57.8    | 57.7  |

|   |               |  |              |                    |
|---|---------------|--|--------------|--------------------|
|  | <b>Title:</b> | Performance report for SiT3372, 155.52 MHz, LVDS |              |                    |
|   | <b>Type:</b>  | Performance report                               | <b>Rev:</b>  | 1.2                |
|   | <b>Orig:</b>  |  | <b>Date:</b> | September 12, 2018 |

## Test description


### Conditions:

- Frequency: 155.52 MHz
- VDD: 2.5 V, 3.3 V
- Pull range:  $\pm 50$  ppm,  $\pm 100$  ppm,  $\pm 150$  ppm,  $\pm 200$  ppm,  $\pm 400$  ppm
- Temperature: 25 °C

### Equipment:

| Model                                 | Measurement / Purpose                                       |
|---------------------------------------|---|
| Keysight DSA90604A (6 GHz, 20 Gsps)   | Period jitter, output amplitude, rise/fall time, duty cycle |
| Keysight 5052B Signal Source Analyzer | Phase noise, integrated phase jitter                        |
| Keysight 34980A                       | Power supply current  |
| Keysight E3631A                       | Power supply  |
| Keysight 53230A                       | Frequency   |



|   |               |  |              |                    |
|---|---------------|--|--------------|--------------------|
|  | <b>Title:</b> | Performance report for SiT3372, 155.52 MHz, LVDS |              |                    |
|   | <b>Type:</b>  | Performance report                               | <b>Rev:</b>  | 1.2                |
|   | <b>Orig:</b>  |  | <b>Date:</b> | September 12, 2018 |

## Setup

### Waveform

For waveform parameters measurement (rise/fall time, differential swing, duty cycle), both DUT outputs are terminated with 100  $\Omega$  differential. Output signals are measured using Keysight 1134B active probe with Keysight N5425B probe head. All measurements are applied to the differential waveform. Figure 6 shows test setup diagram for waveform parameters measurement.

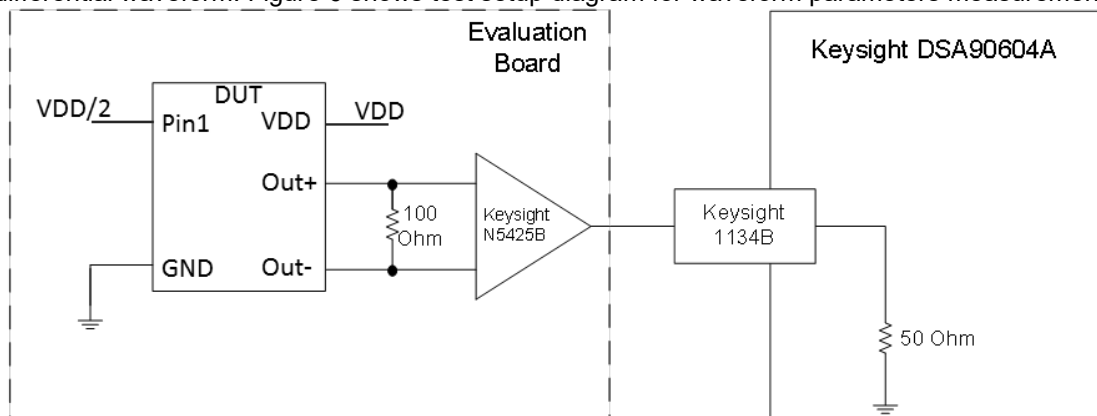


Figure 6. Test setup for measuring waveform parameters (rise/fall time, differential swing, duty cycle)

### Period Jitter

For period jitter measurement outputs are connected through AC-coupling capacitors to the oscilloscope channels. Signals are subtracted inside the oscilloscope. All measurements applied to differential waveform. Figure 7 shows test setup diagram for period jitter measurement.

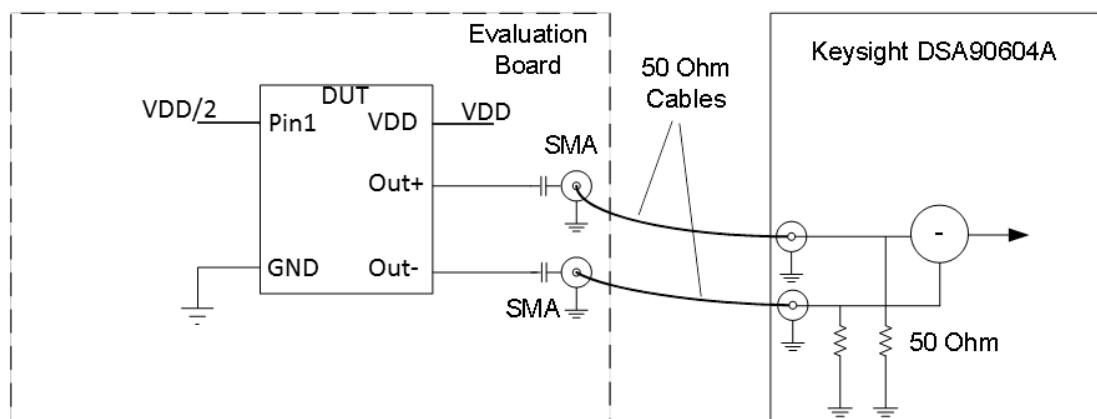



Figure 7. Test setup for measuring period jitter

|   |               |  |              |                    |
|---|---------------|--|--------------|--------------------|
|  | <b>Title:</b> | Performance report for SiT3372, 155.52 MHz, LVDS |              |                    |
|   | <b>Type:</b>  | Performance report                               | <b>Rev:</b>  | 1.2                |
|   | <b>Orig:</b>  |  | <b>Date:</b> | September 12, 2018 |

### Phase noise

For phase noise measurements, differential signal is converted to single-ended using impedance matching transformer. Transformer's output is connected to measurement instrument. Figure 8 shows test setup diagram for phase noise measurement.

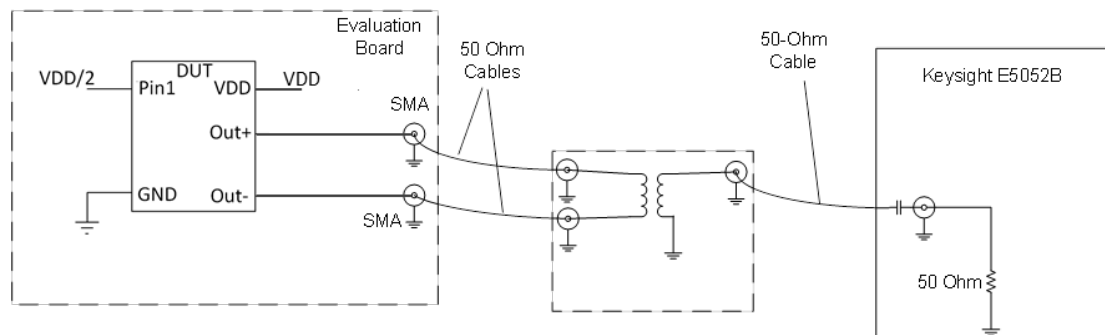


Figure 8. Test setup for measuring phase noise.

### Current consumption

For Current consumption measurement device output is floating. For frequency measurement differential-to-single-ended converter is used.