


|   |               |   |              |                    |
|---|---------------|---|--------------|--------------------|
|  | <b>Title:</b> | Performance report for SiT3372, 74.25 MHz, LVDS |              |                    |
|   | <b>Type:</b>  | Performance report                              | <b>Rev:</b>  | 1.2                |
|   | <b>Orig:</b>  |   | <b>Date:</b> | September 12, 2018 |

## Performance report for SiT3372 - 74.25 MHz, LVDS

### This performance report contains the following data:

- Phase noise
- Random phase jitter
- Output waveforms
- Pull range linearity
- Frequency stability over temperature
- Period jitter
- Duty cycle
- Rise/Fall time
- Amplitude
- Current consumption



|               |   |              |                    |
|---------------|---|--------------|--------------------|
| <b>Title:</b> | Performance report for SiT3372, 74.25 MHz, LVDS |              |                    |
| <b>Type:</b>  | Performance report                              | <b>Rev:</b>  | 1.2                |
| <b>Orig:</b>  |   | <b>Date:</b> | September 12, 2018 |

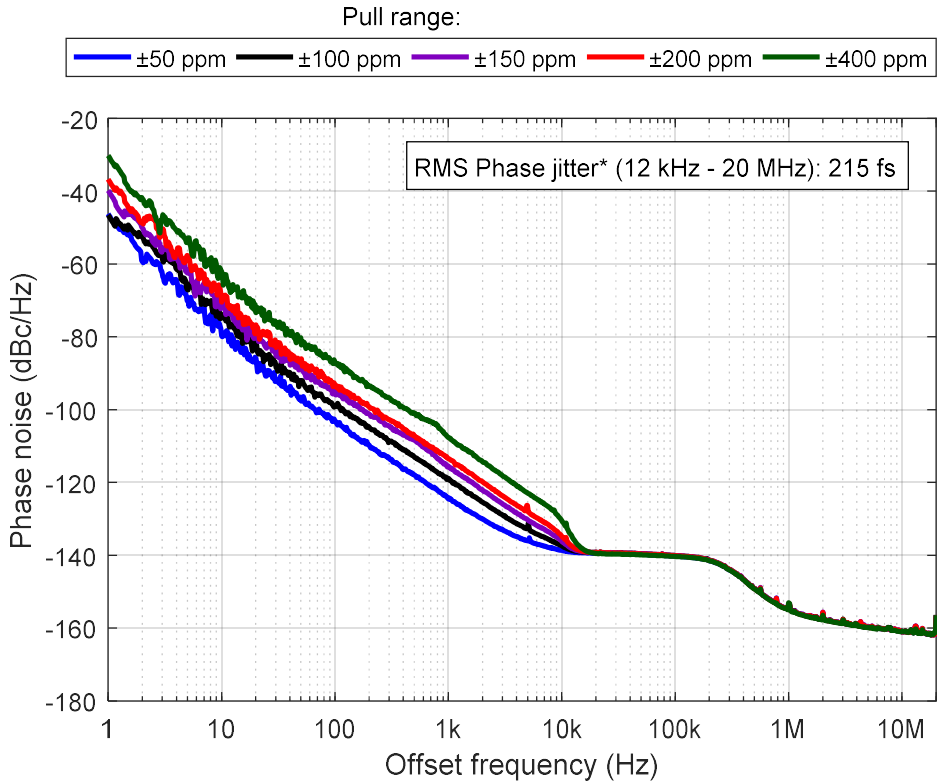


Figure 1: Phase noise, 3.3 V

*\*Integrated phase jitter value applies for ±50 ppm to ±400 ppm pull ranges*

Table 1: Phase noise

| Phase noise dBc/Hz    |                  |        |        |        |        |
|-----------------------|------------------|--------|--------|--------|--------|
| Frequency offset (Hz) | Pull range (ppm) |        |        |        |        |
|                       | ±50              | ±100   | ±150   | ±200   | ±400   |
| 1                     | -46.2            | -46.5  | -39.8  | -36.7  | -30.2  |
| 10                    | -79.8            | -74.9  | -70.1  | -70.5  | -62.1  |
| 100                   | -103.1           | -99.0  | -94.8  | -93.4  | -87.1  |
| 1 K                   | -124.5           | -118.8 | -115.5 | -113.4 | -107.7 |
| 10 K                  | -138.6           | -137.4 | -136.1 | -134.7 | -130.5 |
| 100 K                 | -140.3           | -140.1 | -140.1 | -140.1 | -140.3 |
| 1 M                   | -154.8           | -154.8 | -154.8 | -154.8 | -153.0 |
| 10 M                  | -161.0           | -160.8 | -161.0 | -161.0 | -160.9 |
| 20 M                  | -156.6           | -156.4 | -156.6 | -156.6 | -156.5 |


|   |               |   |              |                    |
|---|---------------|---|--------------|--------------------|
|  | <b>Title:</b> | Performance report for SiT3372, 74.25 MHz, LVDS |              |                    |
|   | <b>Type:</b>  | Performance report                              | <b>Rev:</b>  | 1.2                |
|   | <b>Orig:</b>  |   | <b>Date:</b> | September 12, 2018 |

Table 2: Integrated Phase jitter

| Parameter                                    | Units   | Pull range (ppm) |
|--|---------|------------------|
|  |         | ±50 to ±400      |
| Integrated Phase jitter (1.875 MHz - 20 MHz) | fs, rms | 124              |
| Integrated Phase jitter (12 kHz - 20 MHz)    | fs, rms | 215              |

**The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.**


|   |               |   |              |                    |
|---|---------------|---|--------------|--------------------|
|  | <b>Title:</b> | Performance report for SiT3372, 74.25 MHz, LVDS |              |                    |
|   | <b>Type:</b>  | Performance report                              | <b>Rev:</b>  | 1.2                |
|   | <b>Orig:</b>  |   | <b>Date:</b> | September 12, 2018 |



Figure 2: Output waveform, 2.5 V



Figure 3: Output waveform, 3.3 V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.



|               |   |              |                    |
|---------------|---|--------------|--------------------|
| <b>Title:</b> | Performance report for SiT3372, 74.25 MHz, LVDS |              |                    |
| <b>Type:</b>  | Performance report                              | <b>Rev:</b>  | 1.2                |
| <b>Orig:</b>  |   | <b>Date:</b> | September 12, 2018 |

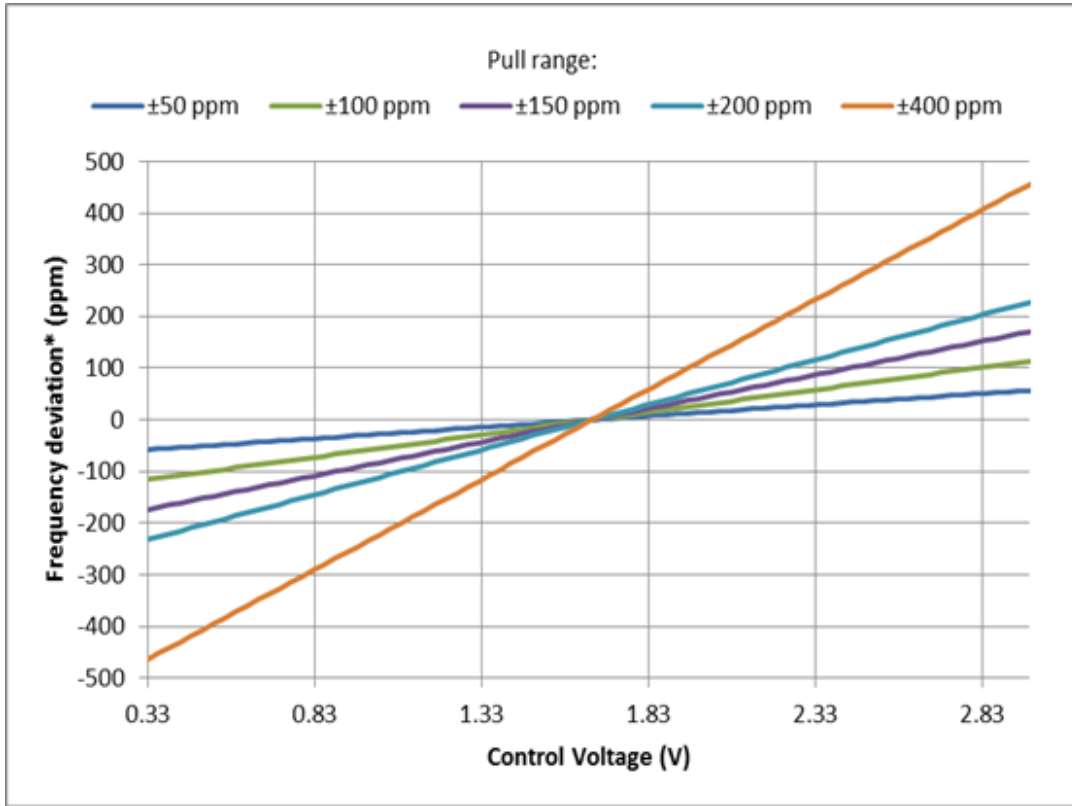


Figure 4: Frequency pull characteristic

|               |               |   |              |                    |
|---------------|---------------|---|--------------|--------------------|
| <b>SiTime</b> | <b>Title:</b> | Performance report for SiT3372, 74.25 MHz, LVDS |              |                    |
|               | <b>Type:</b>  | Performance report                              | <b>Rev:</b>  | 1.2                |
|               | <b>Orig:</b>  |   | <b>Date:</b> | September 12, 2018 |

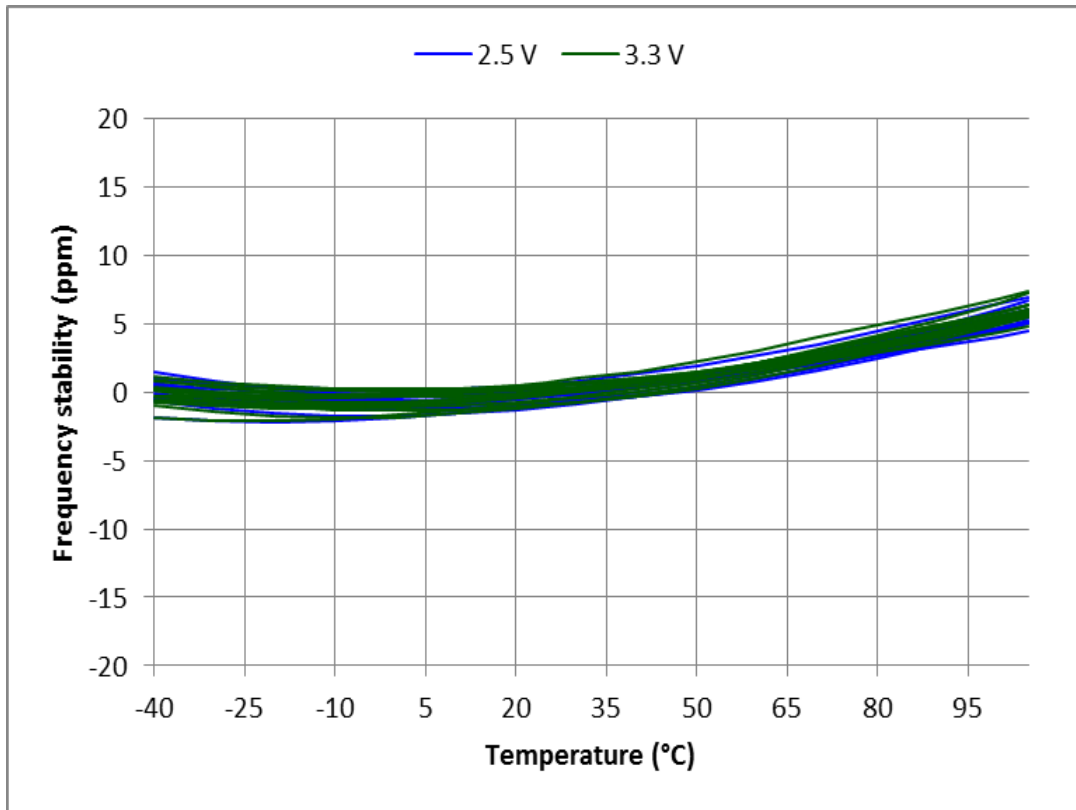


Figure 5: Frequency stability\* over temperature, 2.5 V – 3.3 V, 30 devices

\*SiT3372 frequency stability is independent of output frequency.

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.



|   |               |  |              |                           |
|---|---------------|--|--------------|---------------------------|
|  | <b>Title:</b> | <b>Performance report for SiT3372, 74.25 MHz, LVDS</b> |              |                           |
|   | <b>Type:</b>  | <b>Performance report</b>                              | <b>Rev:</b>  | <b>1.2</b>                |
|   | <b>Orig:</b>  |  | <b>Date:</b> | <b>September 12, 2018</b> |

Table 3: Summary performance data

| Parameter                                      | Units     | Voltage |       |
|--|-----------|---------|-------|
|  |           | 2.5 V   | 3.3 V |
| Period jitter                                  | ps, rms   | 0.80    | 0.76  |
| Period jitter (sample size 10,000 cycles)      | ps, pk-pk | 5.97    | 5.96  |
| Duty cycle                                     | %         | 50.0    | 50.0  |
| Rise time (20% - 80%)                          | ps        | 336     | 335   |
| Fall time (80% - 20%)                          | ps        | 324     | 324   |
| Differential voltage swing                     | V         | 0.68    | 0.69  |
| Current consumption (no load, output enabled)  | mA        | 74.4    | 74.4  |
| Current consumption (no load, output disabled) | mA        | 58.3    | 58.3  |

|   |               |   |              |                    |
|---|---------------|---|--------------|--------------------|
|  | <b>Title:</b> | Performance report for SiT3372, 74.25 MHz, LVDS |              |                    |
|   | <b>Type:</b>  | Performance report                              | <b>Rev:</b>  | 1.2                |
|   | <b>Orig:</b>  |   | <b>Date:</b> | September 12, 2018 |

## Test description


### Conditions:

- Frequency: 74.25 MHz
- VDD: 2.5 V, 3.3 V
- Pull range:  $\pm 50$  ppm,  $\pm 100$  ppm,  $\pm 150$  ppm,  $\pm 200$  ppm,  $\pm 400$  ppm
- Temperature: 25 °C

### Equipment:

| Model                                 | Measurement / Purpose                                       |
|---------------------------------------|---|
| Keysight DSA90604A (6 GHz, 20 Gbps)   | Period jitter, output amplitude, rise/fall time, duty cycle |
| Keysight 5052B Signal Source Analyzer | Phase noise, integrated phase jitter                        |
| Keysight 34980A                       | Power supply current  |
| Keysight E3631A                       | Power supply  |
| Keysight 53230A                       | Frequency   |



|   |               |   |              |                    |
|---|---------------|---|--------------|--------------------|
|  | <b>Title:</b> | Performance report for SiT3372, 74.25 MHz, LVDS |              |                    |
|   | <b>Type:</b>  | Performance report                              | <b>Rev:</b>  | 1.2                |
|   | <b>Orig:</b>  |   | <b>Date:</b> | September 12, 2018 |

## Setup

### Waveform

For waveform parameters measurement (rise/fall time, differential swing, duty cycle), both DUT outputs are terminated with 100  $\Omega$  differential. Output signals are measured using Keysight 1134B active probe with Keysight N5425B probe head. All measurements are applied to the differential waveform. Figure 6 shows test setup diagram for waveform parameters measurement.

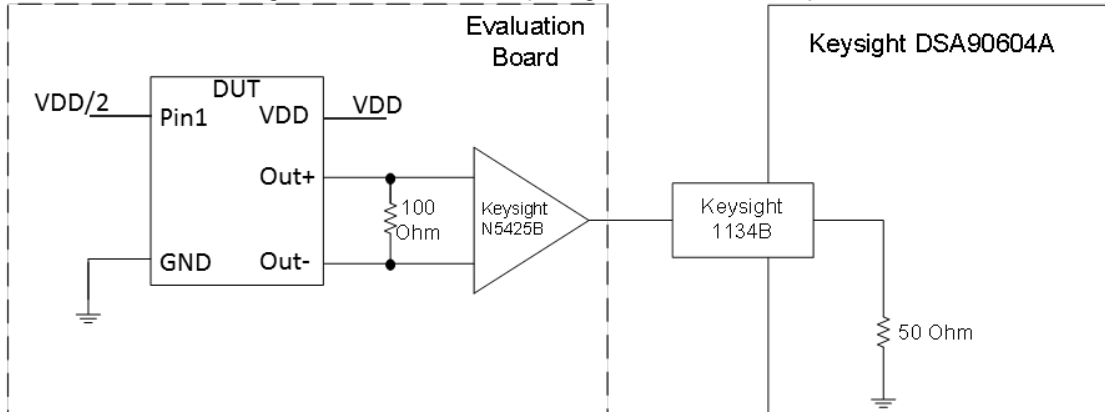


Figure 6. Test setup for measuring waveform parameters (rise/fall time, differential swing, duty cycle)

### Period Jitter

For period jitter measurement outputs are connected through AC-coupling capacitors to the oscilloscope channels. Signals are subtracted inside the oscilloscope. All measurements applied to differential waveform. Figure 7 shows test setup diagram for period jitter measurement.

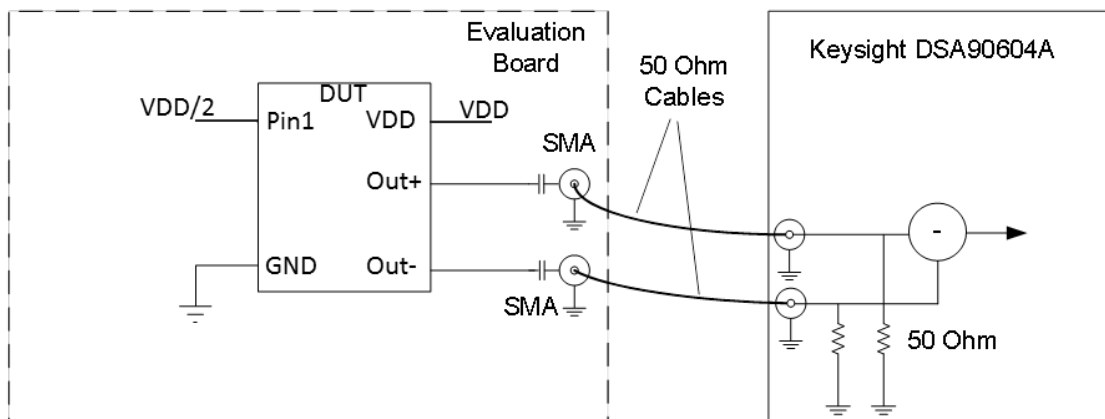


Figure 7. Test setup for measuring period jitter

|               |               |  |              |                           |
|---------------|---------------|--|--------------|---------------------------|
| <b>SiTime</b> | <b>Title:</b> | <b>Performance report for SiT3372, 74.25 MHz, LVDS</b> |              |                           |
|               | <b>Type:</b>  | <b>Performance report</b>                              | <b>Rev:</b>  | <b>1.2</b>                |
|               | <b>Orig:</b>  |  | <b>Date:</b> | <b>September 12, 2018</b> |

**Phase noise**

For phase noise measurements, differential signal is converted to single-ended using impedance matching transformer. Transformer's output is connected to measurement instrument. Figure 8 shows test setup diagram for phase noise measurement.

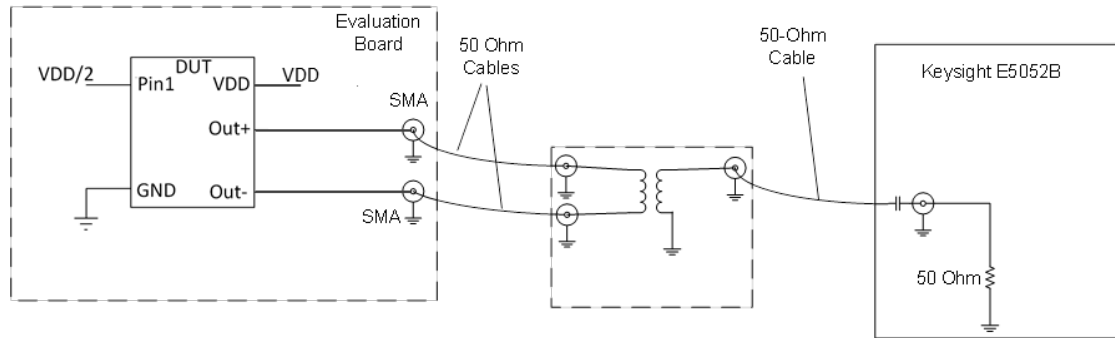


Figure 8. Test setup for measuring phase noise.

**Current consumption**

For Current consumption measurement device output is floating. For frequency measurement differential-to-single-ended converter is used.