Si Time [®]	Title:	Performance Report SiT2018B, 77.76MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014

This report contains sample performance data for SiT2018B-77.76MHz.

Conditions:

- Frequency 77.76 MHz
- Vdd 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Temperature 25℃
- Termination:
 - No load for IDD
 - $\circ~~50\Omega$ to GND for phase noise
 - $\circ \quad 15 pF \text{ for other tests} \quad$

Equipment:

- Agilent DSA90604 oscilloscope (6GHz, 20Gsps)
 - o Period jitter, waveform, rise/fall time, duty cycle, amplitude
- Agilent E5052B Signal Source Analyzer
 - Phase noise, integrated phase jitter
- Power supply current
 - Agilent 34401A DMM

Data:

- Random Phase jitter, Period Jitter, Duty cycle, Rise/Fall time, Amplitude, Idd
- Output waveforms
- Frequency stability versus temperature

Parameter	Units	Voltage				
	Onits	1.8 V	2.5 V	2.8 V	3.0 V	3.3 V
Random Phase jitter (900kHz - 20MHz)	ps, rms	0.58	0.62	0.62	0.62	0.63
Random Phase jitter (12kHz - 20MHz)	ps, rms	1.38	1.41	1.42	1.41	1.40
Period jitter	ps, rms	1.74	1.62	1.54	1.57	1.55
Period jitter (10,000 cycles)	ps, pk-pk	12.8	11.8	11.5	11.2	11.2
Duty cycle	%	49.8	49.7	50.2	50.7	51.3
Rise time (20% - 80%)	ns	1.22	1.01	0.92	0.98	0.91
Fall time (80% - 20%)	ns	1.24	0.98	0.90	0.97	0.92
Amplitude	V	1.77	2.49	2.80	3.02	3.32
Current consumption (no load, output enabled)	mA	4.36	4.68	4.84	4.90	5.08
Current consumption (no load, output disabled)	mA	3.54	3.62	3.67	3.71	3.79

Table 1. Performance data

Si Time [®]	Title:	Performance Report SiT2018B, 77.76MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014

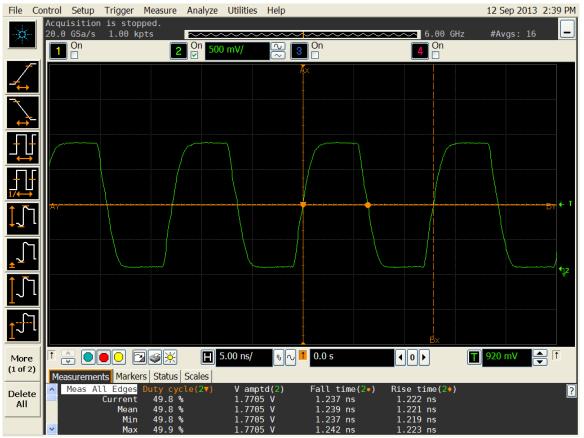


Figure 1. Duty cycle, Rise/Fall time and Amplitude 1.8V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.

Page 2 of 7

Si Time [®]	Title:	Performance Report SiT2018B, 77.76MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014

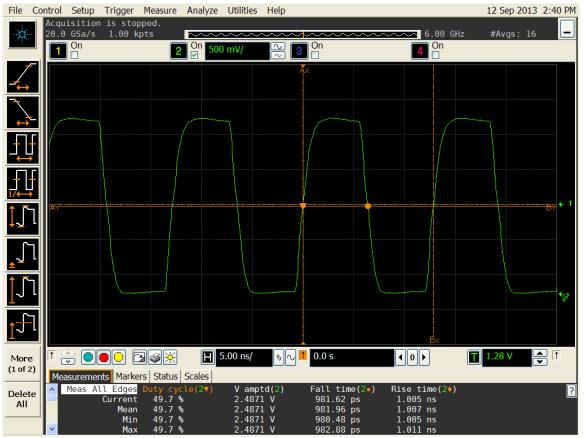


Figure 2. Duty cycle, Rise/Fall time and Amplitude 2.5V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.

Page 3 of 7

Si Time [®]	Title:	Performance Report SiT2018B, 77.76MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014



Figure 3. Duty cycle, Rise/Fall time and Amplitude 2.8V

Si Time [®]	Title:	Performance Report SiT2018B, 77.76MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014



Figure 4. Duty cycle, Rise/Fall time and Amplitude 3.0V

Si Time [®]	Title:	Performance Report SiT2018B, 77.76MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014



Figure 5. Duty cycle, Rise/Fall time and Amplitude 3.3V

Si Time ^{**}	Title:	Performance Report SiT2018B, 77.76MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014

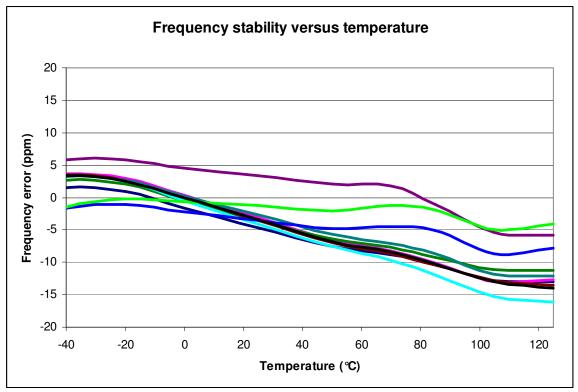


Figure 6. Frequency stability* versus temperature

*Please note that frequency stability in SiTime devices is not depended on output frequency.