Si Time [®]	Title:	Performance Report SiT8008B, 62.5MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Mar 31, 2014

This report contains sample performance data for SiT8008B-62.5MHz.

Conditions:

- Frequency 62.5 MHz
- Vdd 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Temperature 25℃
- Termination:
 - No load for IDD
 - $\circ~~50\Omega$ to GND for phase noise
 - o 15pF for other tests

Equipment:

- Agilent DSA90604 oscilloscope (6GHz, 20Gsps)
 - o Period jitter, waveform, rise/fall time, duty cycle, amplitude
- Agilent E5052B Signal Source Analyzer
 - Phase noise, integrated phase jitter
- Power supply current
 - Agilent 34401A DMM

Data:

- Random Phase jitter, Period Jitter, Duty cycle, Rise/Fall time, Amplitude, Idd
- Output waveforms
- Frequency stability versus temperature

Parameter	Units	Voltage					
	Units	1.8 V	2.5 V	2.8 V	3.0 V	3.3 V	
Random Phase jitter (900kHz - 20MHz)	ps, rms	0.59	0.63	0.63	0.63	0.64	
Random Phase jitter (12kHz - 20MHz)	ps, rms	1.31	1.33	1.35	1.35	1.34	
Period jitter	ps, rms	1.87	1.55	1.53	1.50	1.47	
Period jitter (10,000 cycles)	ps, pk-pk	13.7	11.6	11.3	11.3	10.9	
Duty cycle	%	49.9	49.8	50.2	50.5	50.9	
Rise time (20% - 80%)	ns	1.24	1.02	0.94	1.00	0.94	
Fall time (80% - 20%)	ns	1.25	0.98	0.91	0.97	0.92	
Amplitude	V	1.76	2.44	2.73	2.98	3.25	
Current consumption (no load, output enabled)	mA	4.16	4.42	4.55	4.61	4.75	
Current consumption (no load, output disabled)	mA	3.52	3.60	3.64	3.69	3.76	

Table 1. Performance data

Si Time [®]	Title:	Performance Report SiT8008B, 62.5MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Mar 31, 2014

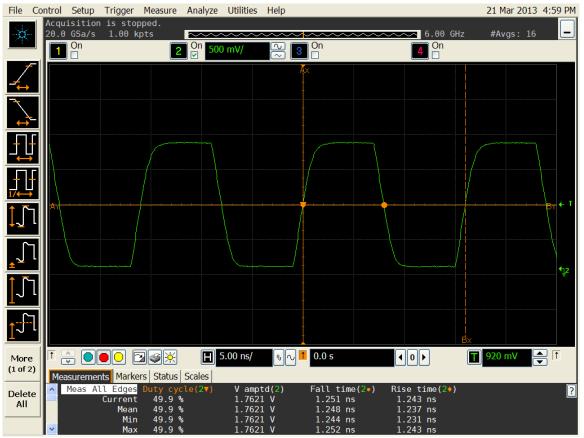


Figure 1. Duty cycle, Rise/Fall time and Amplitude 1.8V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.

Si Time ^{**}	Title:	Performance Report SiT8008B, 62.5MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Mar 31, 2014

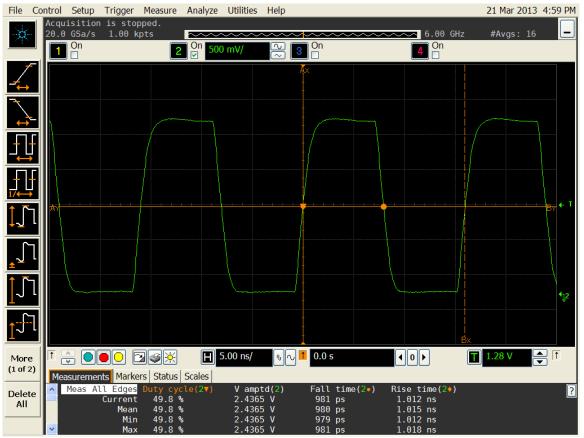


Figure 2. Duty cycle, Rise/Fall time and Amplitude 2.5V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.

Si Time ^{**}	Title:	Performance Report SiT8008B, 62.5MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Mar 31, 2014



Figure 3. Duty cycle, Rise/Fall time and Amplitude 2.8V

Si Time ^{**}	Title:	Performance Report SiT8008B, 62.5MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Mar 31, 2014



Figure 4. Duty cycle, Rise/Fall time and Amplitude 3.0V

Si Time ^{**}	Title:	Performance Report SiT8008B, 62.5MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Mar 31, 2014



Figure 5. Duty cycle, Rise/Fall time and Amplitude 3.3V

Si Time [®]	Title:	Performance Report SiT8008B, 62.5MHz		
	Type:	Performance report	Rev:	1.0
	Orig:		Date:	Mar 31, 2014

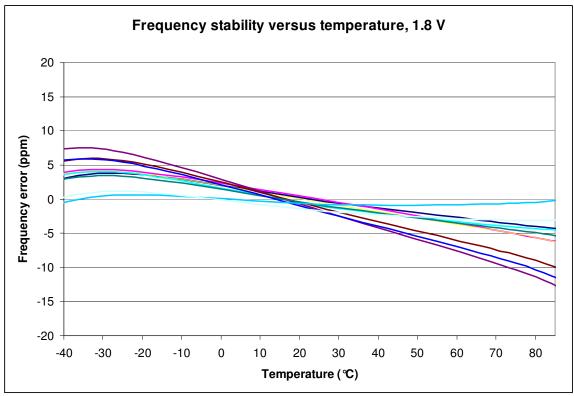


Figure 6. Frequency stability* versus temperature, 1.8 V

*Please note that frequency stability in SiTime devices is not depended on output frequency.

	Title:	Performance Report SiT8008B, 62.5MHz			
Si Time [®]	Туре:	Performance report	Rev:	1.0	
	Orig:		Date:	Mar 31, 2014	

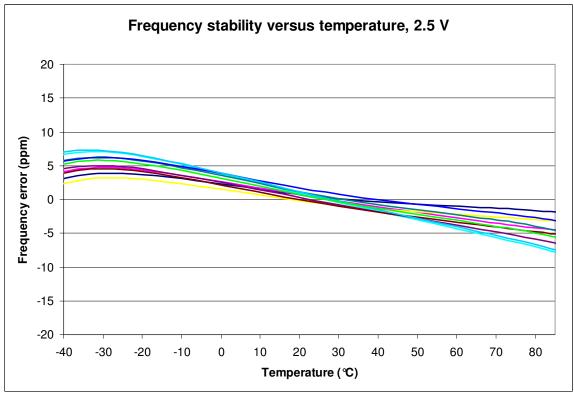


Figure 7. Frequency stability versus temperature, 2.5 V

	Title:	Performance Report SiT8008B, 62.5MHz			
Si Time [®]	Туре:	Performance report	Rev:	1.0	
	Orig:		Date:	Mar 31, 2014	

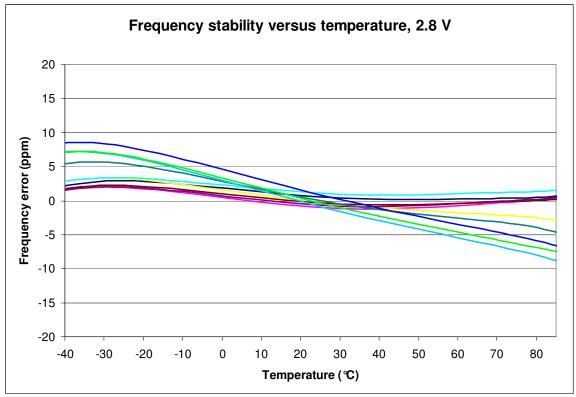


Figure 8. Frequency stability versus temperature, 2.8 V

	Title:	Performance Report SiT8008B, 62.5MHz		
Si Time [®]	Type:	Performance report	Rev:	1.0
	Orig:		Date:	Mar 31, 2014

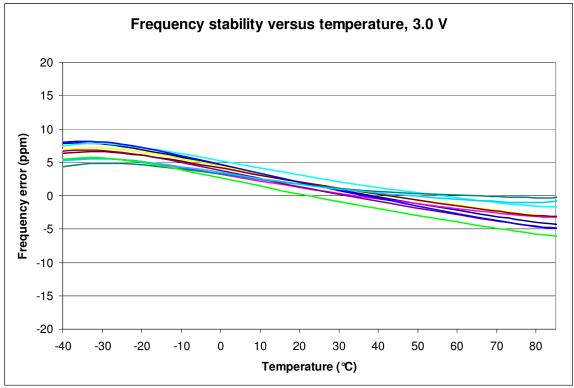


Figure 9. Frequency stability versus temperature, 3.0 V

	Title:	Performance Report SiT8008B, 62.5MHz			
Si Time [®]	Туре:	Performance report	Rev:	1.0	
	Orig:		Date:	Mar 31, 2014	

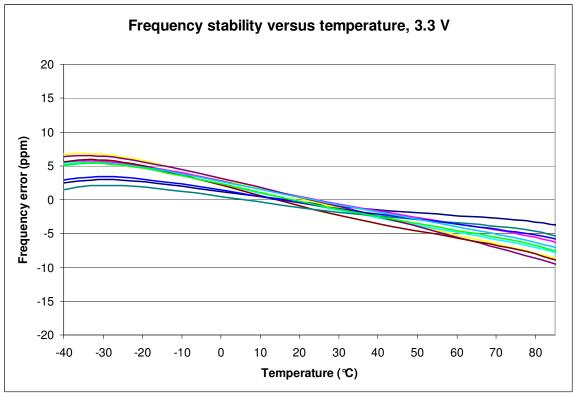


Figure 10. Frequency stability versus temperature, 3.3 V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.