Si Time [™]	Title:	Performance Report SiT1618B, 24MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014

This report contains sample performance data for SiT1618B-24MHz.

Conditions:

- Frequency 24 MHz
- Vdd 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Temperature 25℃
- Termination:
 - No load for IDD
 - $\circ~~50\Omega$ to GND for phase noise
 - $\circ \quad 15 pF \text{ for other tests} \quad$

Equipment:

- Agilent DSA90604 oscilloscope (6GHz, 20Gsps)
 - o Period jitter, waveform, rise/fall time, duty cycle, amplitude
- Agilent E5052B Signal Source Analyzer
 - Phase noise, integrated phase jitter
- Power supply current
 - Agilent 34401A DMM

Data:

- Random Phase jitter, Period Jitter, Duty cycle, Rise/Fall time, Amplitude, Idd
- Output waveforms
- Frequency stability versus temperature

Parameter	Units	Voltage				
Falanelei	Units	1.8 V	2.5 V	2.8 V	3.0 V	3.3 V
Random Phase jitter (900kHz - 5MHz)	ps, rms	0.50	0.51	0.51	0.51	0.51
Random Phase jitter (12kHz - 5MHz)	ps, rms	1.34	1.32	1.32	1.32	1.33
Random Phase jitter (900kHz - 20MHz)*	ps, rms	0.77	0.81	0.80	0.80	0.81
Random Phase jitter (12kHz - 20MHz)*	ps, rms	1.46	1.46	1.46	1.46	1.47
Period jitter	ps, rms	1.96	1.65	1.43	1.47	1.46
Period jitter (10,000 cycles)	ps, pk-pk	15.3	12.2	11.6	11.5	11.6
Duty cycle	%	50.0	49.9	50.1	50.3	50.4
Rise time (20% - 80%)	ns	1.23	1.00	0.91	0.97	0.91
Fall time (80% - 20%)	ns	1.26	0.98	0.90	0.97	0.92
Amplitude	V	1.78	2.48	2.77	3.00	3.30
Current consumption (no load, output enabled)	mA	3.58	3.72	3.78	3.81	3.88
Current consumption (no load, output disabled)	mA	3.38	3.46	3.51	3.55	3.62

Table 1. Performance data

*Calculated by extending the noise floor of the phase noise from 5 MHz to 20 MHz

	Page 1 of 7
The information contained in this document is confidential and propriet	ary to SiTime
Corporation. Unauthorized reproduction or distribution is prohil	bited.

Si Time [®]	Title:	Performance Report SiT1618B, 24MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014

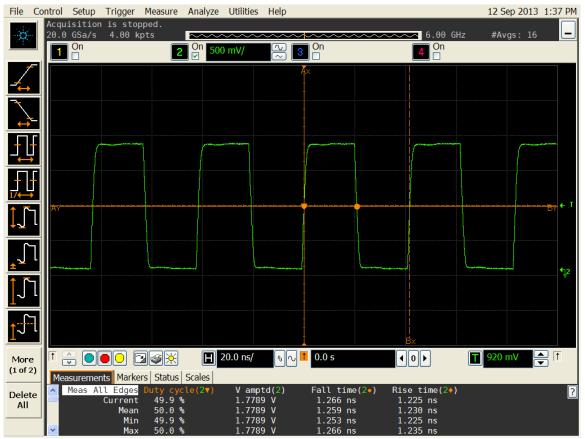


Figure 1. Duty cycle, Rise/Fall time and Amplitude 1.8V

Si Time [®]	Title:	Performance Report SiT1618B, 24MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014



Figure 2. Duty cycle, Rise/Fall time and Amplitude 2.5V

Si Time [®]	Title:	Performance Report SiT1618B, 24MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014



Figure 3. Duty cycle, Rise/Fall time and Amplitude 2.8V

Si Time [®]	Title:	Performance Report SiT1618B, 24MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014



Figure 4. Duty cycle, Rise/Fall time and Amplitude 3.0V

Si Time [®]	Title:	Performance Report SiT1618B, 24MHz		
	Туре:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014

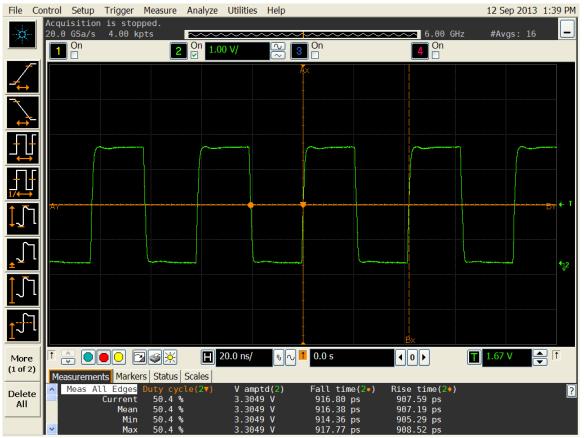


Figure 5. Duty cycle, Rise/Fall time and Amplitude 3.3V

Si Time [™]	Title:	Performance Report SiT1618B, 24MHz		
	Type:	Performance report	Rev:	1.0
	Orig:		Date:	Nov 24, 2014

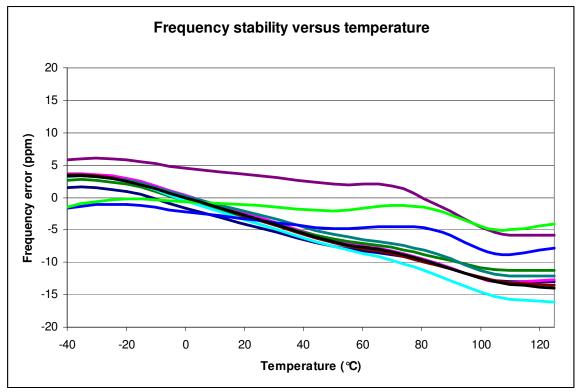


Figure 6. Frequency stability* versus temperature

*Please note that frequency stability in SiTime devices is not depended on output frequency.