

| Title: | Performance Report SiT1618B, 30MHz |       |              |
|--------|------------------------------------|-------|--------------|
| Type:  | Performance report                 | Rev:  | 1.0          |
| Orig:  |                                    | Date: | Nov 21, 2014 |

## This report contains sample performance data for SiT1618B-30MHz.

## **Conditions:**

- Frequency 30 MHz
- Vdd 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Temperature 25°C
- Termination:
  - No load for IDD
  - $\circ$  50 $\Omega$  to GND for phase noise
  - o 15pF for other tests

## **Equipment:**

- Agilent DSA90604 oscilloscope (6GHz, 20Gsps)
  - o Period jitter, waveform, rise/fall time, duty cycle, amplitude
- Agilent E5052B Signal Source Analyzer
  - o Phase noise, integrated phase jitter
- Power supply current
  - o Agilent 34401A DMM

## Data:

- Random Phase jitter, Period Jitter, Duty cycle, Rise/Fall time, Amplitude, Idd
- Output waveforms
- Frequency stability versus temperature

Table 1. Performance data

| Parameter                                      | Units     |       | Voltage |       |       |       |
|--|-----------|-------|---------|-------|-------|-------|
| i didilictei                                   | Offics    | 1.8 V | 2.5 V   | 2.8 V | 3.0 V | 3.3 V |
| Random Phase jitter (900kHz - 5MHz)            | ps, rms   | 0.52  | 0.54    | 0.53  | 0.53  | 0.54  |
| Random Phase jitter (12kHz - 5MHz)             | ps, rms   | 1.42  | 1.37    | 1.36  | 1.36  | 1.35  |
| Random Phase jitter (900kHz – 20MHz)*          | ps, rms   | 0.79  | 0.83    | 0.83  | 0.82  | 0.83  |
| Random Phase jitter (12kHz – 20MHz)*           | ps, rms   | 1.54  | 1.51    | 1.50  | 1.49  | 1.49  |
| Period jitter                                  | ps, rms   | 2.39  | 1.83    | 1.75  | 1.76  | 1.68  |
| Period jitter (10,000 cycles)                  | ps, pk-pk | 16.9  | 13.4    | 13.0  | 12.7  | 12.4  |
| Duty cycle                                     | %         | 49.9  | 49.9    | 50.2  | 50.3  | 50.5  |
| Rise time (20% - 80%)                          | ns        | 1.23  | 1.00    | 0.91  | 0.96  | 0.91  |
| Fall time (80% - 20%)                          | ns        | 1.25  | 0.98    | 0.90  | 0.96  | 0.91  |
| Amplitude                                      | V         | 1.77  | 2.48    | 2.77  | 2.98  | 3.29  |
| Current consumption (no load, output enabled)  | mA        | 3.69  | 3.85    | 4.10  | 3.94  | 4.03  |
| Current consumption (no load, output disabled) | mA        | 3.42  | 3.49    | 3.75  | 3.58  | 3.65  |

<sup>\*</sup>Calculated by extending the noise floor of the phase noise from 5 MHz to 20 MHz



| Title: | Performance Report SiT1618B, 30MHz |       |              |
|--------|------------------------------------|-------|--------------|
| Type:  | Performance report                 | Rev:  | 1.0          |
| Orig:  |                                    | Date: | Nov 21, 2014 |



Figure 1. Duty cycle, Rise/Fall time and Amplitude 1.8V



| Title: | Performance Report SiT1618B, 30MHz |       |              |
|--------|------------------------------------|-------|--------------|
| Type:  | Performance report                 | Rev:  | 1.0          |
| Orig:  |                                    | Date: | Nov 21, 2014 |



Figure 2. Duty cycle, Rise/Fall time and Amplitude 2.5V



| Title: | Performance Report SiT1618B, 30MHz |       |              |
|--------|------------------------------------|-------|--------------|
| Type:  | Performance report                 | Rev:  | 1.0          |
| Orig:  |                                    | Date: | Nov 21, 2014 |



Figure 3. Duty cycle, Rise/Fall time and Amplitude 2.8V



| Title: | Performance Report SiT1618B, 30MHz |       |              |
|--------|------------------------------------|-------|--------------|
| Type:  | Performance report                 | Rev:  | 1.0          |
| Orig:  |                                    | Date: | Nov 21, 2014 |



Figure 4. Duty cycle, Rise/Fall time and Amplitude 3.0V



| Title: | Performance Report SiT1618B, 30MHz |       |              |
|--------|------------------------------------|-------|--------------|
| Type:  | Performance report                 | Rev:  | 1.0          |
| Orig:  |                                    | Date: | Nov 21, 2014 |



Figure 5. Duty cycle, Rise/Fall time and Amplitude 3.3V



| Title: | Performance Report SiT1618B, 30MHz |       |              |  |
|--------|------------------------------------|-------|--------------|--|
| Type:  | Performance report                 | Rev:  | 1.0          |  |
| Orig:  |                                    | Date: | Nov 21, 2014 |  |

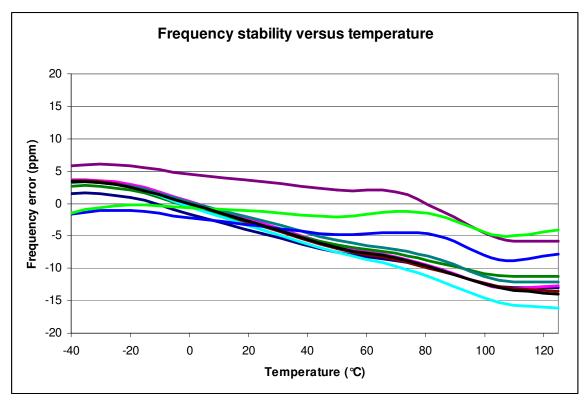


Figure 6. Frequency stability\* versus temperature

\*Please note that frequency stability in SiTime devices is not depended on output frequency.