

Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	

This report contains sample performance data for SiT2001B-33.3333MHz.

Conditions:

- Frequency 33.3333 MHz
- Vdd 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Temperature 25°C
- Termination:
 - No load for IDD
 - \circ 50 Ω to GND for phase noise
 - o 15pF for other tests

Equipment:

- Agilent DSA90604 oscilloscope (6GHz, 20Gsps)
 - o Period jitter, waveform, rise/fall time, duty cycle, amplitude
- Agilent E5052B Signal Source Analyzer
 - o Phase noise, integrated phase jitter
- Power supply current
 - o Agilent 34401A DMM

Data:

- Random Phase jitter, Period Jitter, Duty cycle, Rise/Fall time, Amplitude, Idd
- Output waveforms
- Frequency stability versus temperature

Table 1. Performance data

Parameter	Units	Voltage				
raiametei	Office	1.8 V	2.5 V	2.8 V	3.0 V	3.3 V
Random Phase jitter (900kHz - 5MHz)	ps, rms	0.51	0.55	0.54	0.55	0.55
Random Phase jitter (12kHz - 5MHz)	ps, rms	1.34	1.34	1.33	1.34	1.33
Random Phase jitter (900kHz - 20MHz)*	ps, rms	0.77	0.83	0.82	0.82	0.83
Random Phase jitter (12kHz - 20MHz)*	ps, rms	1.46	1.47	1.46	1.47	1.46
Period jitter	ps, rms	1.79	1.72	1.70	1.67	1.64
Period jitter (10,000 cycles)	ps, pk-pk	12.8	12.0	11.7	11.6	11.8
Duty cycle	%	49.9	49.9	50.1	50.3	50.5
Rise time (20% - 80%)	ns	1.24	1.03	0.95	1.00	0.95
Fall time (80% - 20%)	ns	1.23	0.99	0.90	0.97	0.93
Amplitude	V	1.76	2.46	2.75	2.98	3.29
Current consumption (no load, output enabled)	mA	3.77	3.93	4.01	4.04	4.13
Current consumption (no load, output disabled)	mA	3.46	3.53	3.58	3.62	3.70

^{*}Calculated by extending the noise floor of the phase noise from 5 MHz to 20 MHz



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	

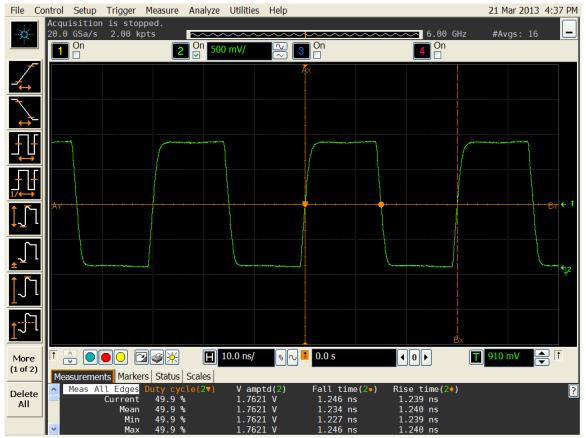


Figure 1. Duty cycle, Rise/Fall time and Amplitude 1.8V



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	



Figure 2. Duty cycle, Rise/Fall time and Amplitude 2.5V



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	



Figure 3. Duty cycle, Rise/Fall time and Amplitude 2.8V



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	



Figure 4. Duty cycle, Rise/Fall time and Amplitude 3.0V



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	

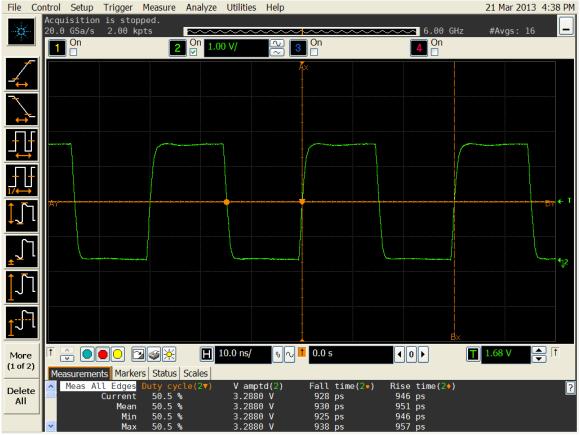


Figure 5. Duty cycle, Rise/Fall time and Amplitude 3.3V



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	

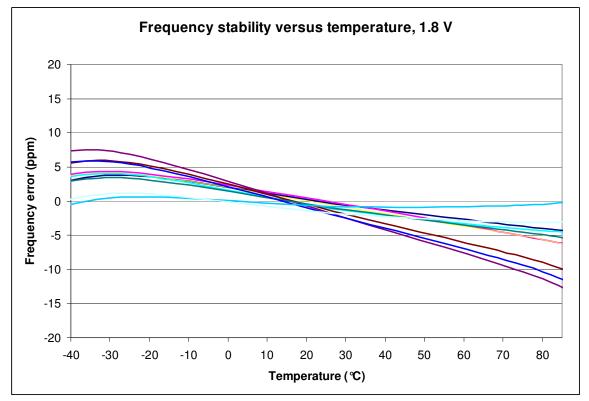


Figure 6. Frequency stability* versus temperature, 1.8 V

^{*}Please note that frequency stability in SiTime devices is not depended on output frequency.



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	

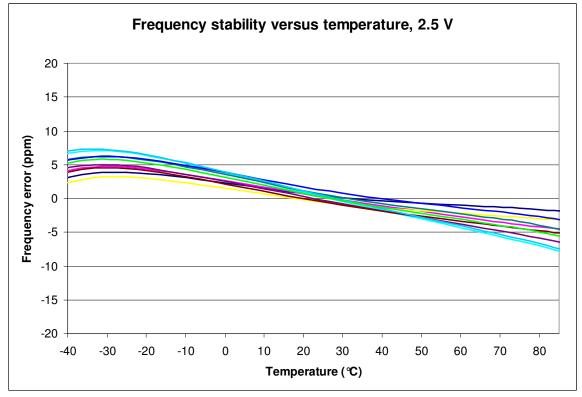


Figure 7. Frequency stability versus temperature, 2.5 V



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	

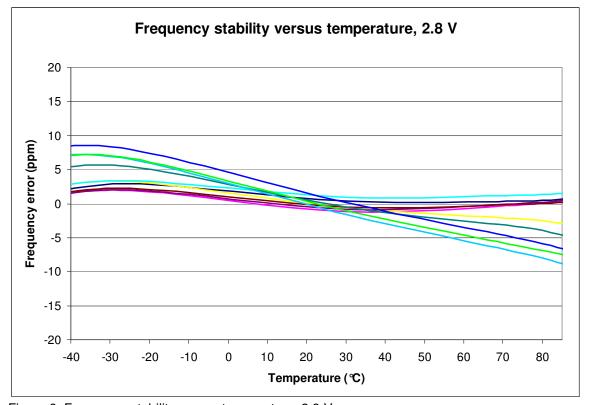


Figure 8. Frequency stability versus temperature, 2.8 V



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	

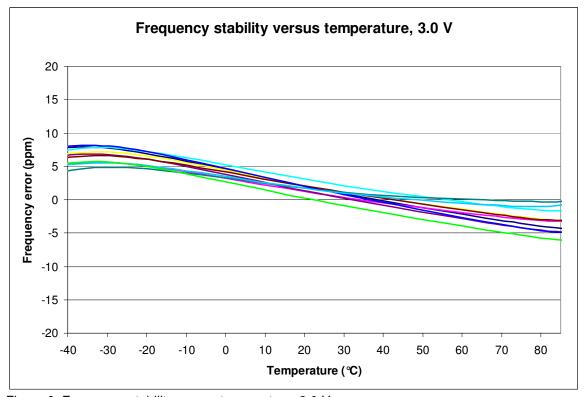


Figure 9. Frequency stability versus temperature, 3.0 V



Title:	Performance Report SiT2001B, 33.3333MHz			
Type:	Performance report	Rev:	1.0	
Orig:		Date:	Mar 31, 2014	

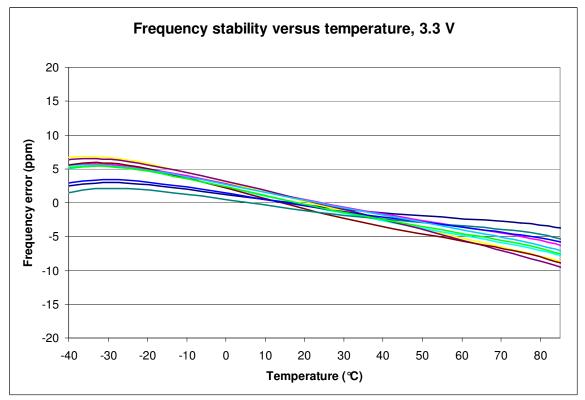


Figure 10. Frequency stability versus temperature, 3.3 V