| Si Time [™] | Title: | Performance Report SiT2018B, 72MHz | | |
|-----------------------------|--------|------------------------------------|-------|--------------|
| | Туре: | Performance report | Rev: | 1.0 |
| | Orig: | | Date: | Nov 24, 2014 |

This report contains sample performance data for SiT2018B-72MHz.

Conditions:

- Frequency 72 MHz
- Vdd 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Temperature 25℃
- Termination:
 - No load for IDD
 - $\circ~~50\Omega$ to GND for phase noise
 - $\circ \quad 15 pF \text{ for other tests} \quad$

Equipment:

- Agilent DSA90604 oscilloscope (6GHz, 20Gsps)
 - o Period jitter, waveform, rise/fall time, duty cycle, amplitude
- Agilent E5052B Signal Source Analyzer
 - Phase noise, integrated phase jitter
- Power supply current
 - Agilent 34401A DMM

Data:

- Random Phase jitter, Period Jitter, Duty cycle, Rise/Fall time, Amplitude, Idd
- Output waveforms
- Frequency stability versus temperature

| Parameter | Units | Voltage | | | | |
|--|-----------|---------|-------|-------|-------|-------|
| | Offics | 1.8 V | 2.5 V | 2.8 V | 3.0 V | 3.3 V |
| Random Phase jitter (900kHz - 20MHz) | ps, rms | 0.59 | 0.64 | 0.64 | 0.65 | 0.65 |
| Random Phase jitter (12kHz - 20MHz) | ps, rms | 1.45 | 1.46 | 1.51 | 1.49 | 1.49 |
| Period jitter | ps, rms | 1.88 | 1.65 | 1.66 | 1.62 | 1.59 |
| Period jitter (10,000 cycles) | ps, pk-pk | 13.8 | 11.8 | 11.5 | 11.4 | 11.2 |
| Duty cycle | % | 49.8 | 49.9 | 50.5 | 50.8 | 51.3 |
| Rise time (20% - 80%) | ns | 1.22 | 0.98 | 0.90 | 0.96 | 0.89 |
| Fall time (80% - 20%) | ns | 1.25 | 0.97 | 0.89 | 0.96 | 0.91 |
| Amplitude | V | 1.77 | 2.45 | 2.75 | 2.98 | 3.25 |
| Current consumption (no load, output enabled) | mA | 4.19 | 4.48 | 4.64 | 4.70 | 4.85 |
| Current consumption (no load, output disabled) | mA | 3.44 | 3.52 | 3.57 | 3.60 | 3.68 |

Table 1. Performance data

| Si Time [®] | Title: | Performance Report SiT2018B, 72MHz | | |
|-----------------------------|--------|------------------------------------|-------|--------------|
| | Туре: | Performance report | Rev: | 1.0 |
| | Orig: | | Date: | Nov 24, 2014 |

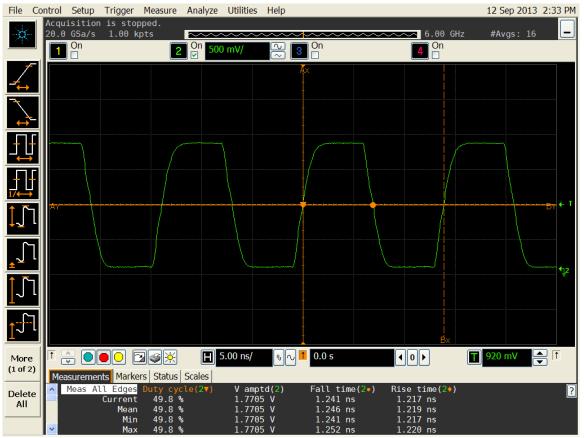


Figure 1. Duty cycle, Rise/Fall time and Amplitude 1.8V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.

| Si Time [®] | Title: | Performance Report SiT2018B, 72MHz | | |
|-----------------------------|--------|------------------------------------|-------|--------------|
| | Туре: | Performance reportRev:1.0 | | 1.0 |
| | Orig: | | Date: | Nov 24, 2014 |

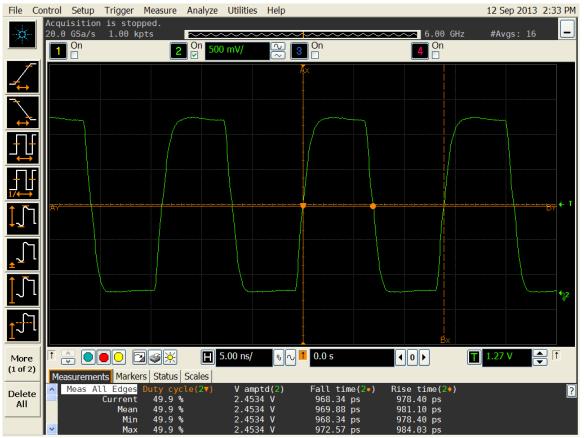


Figure 2. Duty cycle, Rise/Fall time and Amplitude 2.5V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.

| Si Time [®] | Title: | Performance Report SiT2018B, 72MHz | | |
|-----------------------------|--------|------------------------------------|-------|--------------|
| | Туре: | Performance report | Rev: | 1.0 |
| | Orig: | | Date: | Nov 24, 2014 |

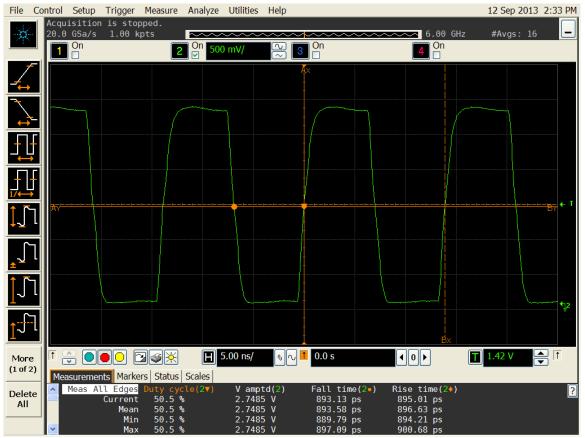


Figure 3. Duty cycle, Rise/Fall time and Amplitude 2.8V

| Si Time [®] | Title: | Performance Report SiT2018B, 72MHz | | |
|-----------------------------|--------|------------------------------------|-------|--------------|
| | Туре: | Performance report | Rev: | 1.0 |
| | Orig: | | Date: | Nov 24, 2014 |



Figure 4. Duty cycle, Rise/Fall time and Amplitude 3.0V

| Si Time [®] | Title: | Performance Report SiT2018B, 72MHz | | |
|-----------------------------|--------|------------------------------------|-------|--------------|
| | Туре: | Performance report | Rev: | 1.0 |
| | Orig: | | Date: | Nov 24, 2014 |



Figure 5. Duty cycle, Rise/Fall time and Amplitude 3.3V

The information contained in this document is confidential and proprietary to SiTime Corporation. Unauthorized reproduction or distribution is prohibited.

| Si Time [™] | Title: | Performance Report SiT2018B, 72MHz | | |
|-----------------------------|--------|------------------------------------|-------|--------------|
| | Type: | Performance report | Rev: | 1.0 |
| | Orig: | | Date: | Nov 24, 2014 |

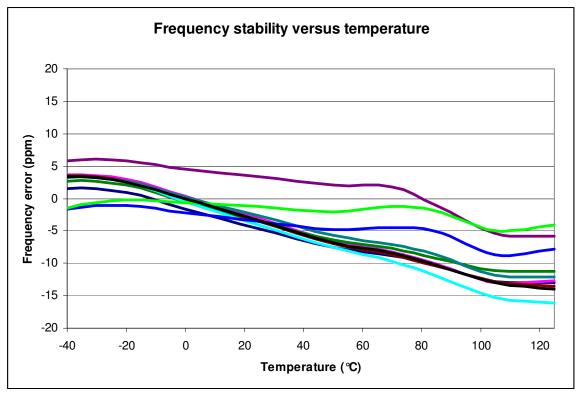


Figure 6. Frequency stability* versus temperature

*Please note that frequency stability in SiTime devices is not depended on output frequency.