

| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report Rev: 1.0            |       |              |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |

## This report contains sample performance data for SiT8008B-74.176MHz.

## Conditions:

- Frequency 74.176 MHz
- Vdd 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Temperature 25 °C
- Termination:
  - No load for IDD
  - $\circ$  50 $\Omega$  to GND for phase noise
  - o 15pF for other tests

## **Equipment:**

- Agilent DSA90604 oscilloscope (6GHz, 20Gsps)
  - o Period jitter, waveform, rise/fall time, duty cycle, amplitude
- Agilent E5052B Signal Source Analyzer
  - o Phase noise, integrated phase jitter
- Power supply current
  - o Agilent 34401A DMM

## Data:

- Random Phase jitter, Period Jitter, Duty cycle, Rise/Fall time, Amplitude, Idd
- Output waveforms
- Frequency stability versus temperature

Table 1. Performance data

| Parameter                                      | Units     | Voltage |       |       |       |       |
|------------------------------------------------|-----------|---------|-------|-------|-------|-------|
| i didilictei                                   | Offics    | 1.8 V   | 2.5 V | 2.8 V | 3.0 V | 3.3 V |
| Random Phase jitter (900kHz - 20MHz)           | ps, rms   | 0.62    | 0.66  | 0.66  | 0.66  | 0.66  |
| Random Phase jitter (12kHz - 20MHz)            | ps, rms   | 1.44    | 1.44  | 1.45  | 1.47  | 1.47  |
| Period jitter                                  | ps, rms   | 1.91    | 1.66  | 1.62  | 1.59  | 1.61  |
| Period jitter (10,000 cycles)                  | ps, pk-pk | 13.4    | 12.0  | 11.9  | 11.7  | 11.5  |
| Duty cycle                                     | %         | 49.9    | 49.7  | 50.2  | 50.8  | 51.1  |
| Rise time (20% - 80%)                          | ns        | 1.23    | 1.05  | 0.95  | 1.00  | 0.96  |
| Fall time (80% - 20%)                          | ns        | 1.25    | 1.01  | 0.92  | 0.98  | 0.94  |
| Amplitude                                      | V         | 1.77    | 2.48  | 2.77  | 2.98  | 3.30  |
| Current consumption (no load, output enabled)  | mA        | 4.25    | 4.57  | 4.72  | 4.79  | 4.95  |
| Current consumption (no load, output disabled) | mA        | 3.49    | 3.56  | 3.62  | 3.65  | 3.73  |



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report                     | Rev:  | 1.0          |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |



Figure 1. Duty cycle, Rise/Fall time and Amplitude 1.8V



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report                     | Rev:  | 1.0          |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |



Figure 2. Duty cycle, Rise/Fall time and Amplitude 2.5V



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report                     | Rev:  | 1.0          |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |



Figure 3. Duty cycle, Rise/Fall time and Amplitude 2.8V



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report                     | Rev:  | 1.0          |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |



Figure 4. Duty cycle, Rise/Fall time and Amplitude 3.0V



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report                     | Rev:  | 1.0          |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |



Figure 5. Duty cycle, Rise/Fall time and Amplitude 3.3V



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report                     | Rev:  | 1.0          |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |

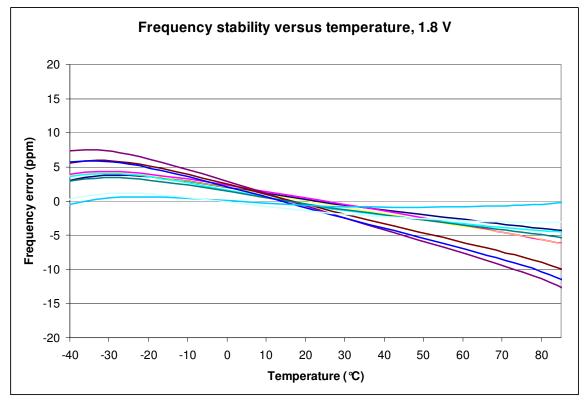


Figure 6. Frequency stability\* versus temperature, 1.8 V

<sup>\*</sup>Please note that frequency stability in SiTime devices is not depended on output frequency.



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report                     | Rev:  | 1.0          |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |

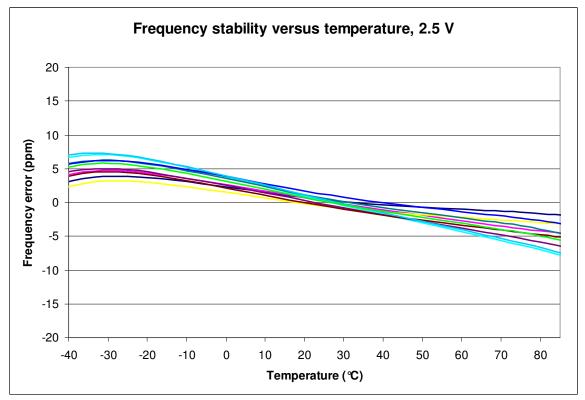


Figure 7. Frequency stability versus temperature, 2.5 V



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report                     | Rev:  | 1.0          |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |

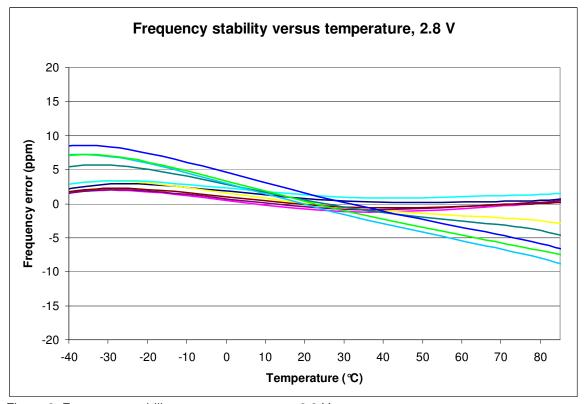


Figure 8. Frequency stability versus temperature, 2.8 V



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report Rev: 1.0            |       |              |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |

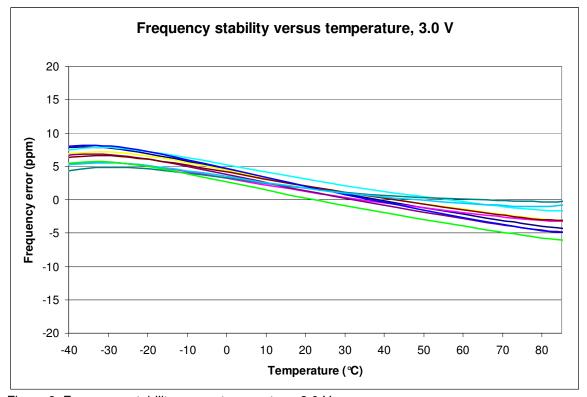


Figure 9. Frequency stability versus temperature, 3.0 V



| Title: | Performance Report SiT8008B, 74.176MHz |       |              |  |
|--------|----------------------------------------|-------|--------------|--|
| Type:  | Performance report                     | Rev:  | 1.0          |  |
| Orig:  |                                        | Date: | Mar 31, 2014 |  |

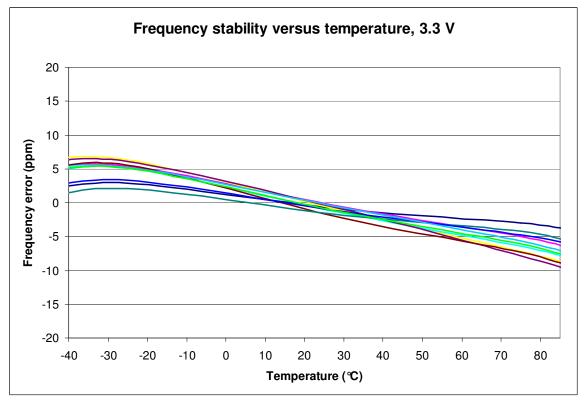


Figure 10. Frequency stability versus temperature, 3.3 V